

# Chapter 1

---

## INTRODUCTION AND BASIC CONCEPTS

Every science has a unique vocabulary associated with it, and thermodynamics is no exception. Precise definition of basic concepts forms a sound foundation for the development of a science and prevents possible misunderstandings. We start this chapter with an overview of thermodynamics and the unit systems, and continue with a discussion of some basic concepts such as *system*, *state*, *state postulate*, *equilibrium*, and *process*. We also discuss *temperature* and *temperature scales* with particular emphasis on the International Temperature Scale of 1990. We then present *pressure*, which is the normal force exerted by a fluid per unit area and discuss *absolute* and *gage* pressures, the variation of pressure with depth, and pressure measurement devices, such as manometers and barometers. Careful study of these concepts is essential for a good understanding of the topics in the following chapters. Finally, we present an intuitive systematic *problem-solving technique* that can be used as a model in solving engineering problems.

### Objectives


---

The objectives of Chapter 1 are to:


- Identify the unique vocabulary associated with thermodynamics through the precise definition of basic concepts to form a sound foundation for the development of the principles of thermodynamics.
- Review the metric SI and the English unit systems that will be used throughout the text.
- Explain the basic concepts of thermodynamics such as system, state, state postulate, equilibrium, process, and cycle.
- Review concepts of temperature, temperature scales, pressure, and absolute and gage pressure.
- Introduce an intuitive systematic problem-solving technique.


**INTERACTIVE  
TUTORIAL**

SEE TUTORIAL CH. 1, SEC. 1 ON THE DVD.

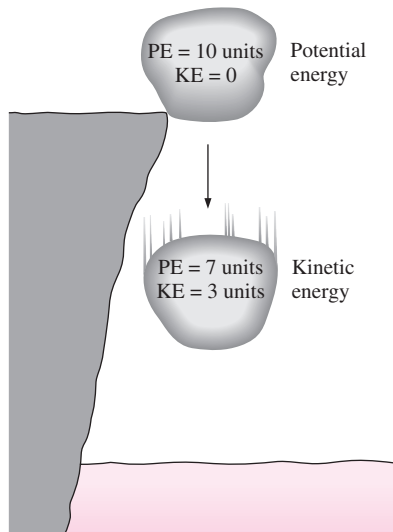
**FIGURE 1-1**

Energy cannot be created or destroyed; it can only change forms (the first law).

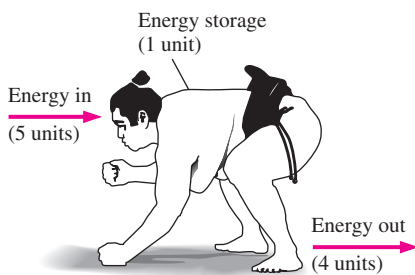
**FIGURE 1-2**

Conservation of energy principle for the human body.

## 1-1 ■ THERMODYNAMICS AND ENERGY

Thermodynamics can be defined as the science of *energy*. Although everybody has a feeling of what energy is, it is difficult to give a precise definition for it. Energy can be viewed as the ability to cause changes.

The name *thermodynamics* stems from the Greek words *therme* (heat) and *dynamis* (power), which is most descriptive of the early efforts to convert heat into power. Today the same name is broadly interpreted to include all aspects of energy and energy transformations, including power generation, refrigeration, and relationships among the properties of matter.

One of the most fundamental laws of nature is the **conservation of energy principle**. It simply states that during an interaction, energy can change from one form to another but the total amount of energy remains constant. That is, energy cannot be created or destroyed. A rock falling off a cliff, for example, picks up speed as a result of its potential energy being converted to kinetic energy (Fig. 1-1). The conservation of energy principle also forms the backbone of the diet industry: A person who has a greater energy input (food) than energy output (exercise) will gain weight (store energy in the form of fat), and a person who has a smaller energy input than output will lose weight (Fig. 1-2). The change in the energy content of a body or any other system is equal to the difference between the energy input and the energy output, and the energy balance is expressed as  $E_{\text{in}} - E_{\text{out}} = \Delta E$ .

The **first law of thermodynamics** is simply an expression of the conservation of energy principle, and it asserts that *energy* is a thermodynamic property. The **second law of thermodynamics** asserts that energy has *quality* as well as *quantity*, and actual processes occur in the direction of decreasing quality of energy. For example, a cup of hot coffee left on a table eventually cools, but a cup of cool coffee in the same room never gets hot by itself (Fig. 1-3). The high-temperature energy of the coffee is degraded (transformed into a less useful form at a lower temperature) once it is transferred to the surrounding air.

Although the principles of thermodynamics have been in existence since the creation of the universe, thermodynamics did not emerge as a science until the construction of the first successful atmospheric steam engines in England by Thomas Savery in 1697 and Thomas Newcomen in 1712. These engines were very slow and inefficient, but they opened the way for the development of a new science.

The first and second laws of thermodynamics emerged simultaneously in the 1850s, primarily out of the works of William Rankine, Rudolph Clausius, and Lord Kelvin (formerly William Thomson). The term *thermodynamics* was first used in a publication by Lord Kelvin in 1849. The first thermodynamic textbook was written in 1859 by William Rankine, a professor at the University of Glasgow.

It is well-known that a substance consists of a large number of particles called *molecules*. The properties of the substance naturally depend on the behavior of these particles. For example, the pressure of a gas in a container is the result of momentum transfer between the molecules and the walls of the container. However, one does not need to know the behavior of the gas

particles to determine the pressure in the container. It would be sufficient to attach a pressure gage to the container. This macroscopic approach to the study of thermodynamics that does not require a knowledge of the behavior of individual particles is called **classical thermodynamics**. It provides a direct and easy way to the solution of engineering problems. A more elaborate approach, based on the average behavior of large groups of individual particles, is called **statistical thermodynamics**. This microscopic approach is rather involved and is used in this text only in the supporting role.

## Application Areas of Thermodynamics

All activities in nature involve some interaction between energy and matter; thus, it is hard to imagine an area that does not relate to thermodynamics in some manner. Therefore, developing a good understanding of basic principles of thermodynamics has long been an essential part of engineering education.

Thermodynamics is commonly encountered in many engineering systems and other aspects of life, and one does not need to go very far to see some application areas of it. In fact, one does not need to go anywhere. The heart is constantly pumping blood to all parts of the human body, various energy conversions occur in trillions of body cells, and the body heat generated is constantly rejected to the environment. The human comfort is closely tied to the rate of this metabolic heat rejection. We try to control this heat transfer rate by adjusting our clothing to the environmental conditions.

Other applications of thermodynamics are right where one lives. An ordinary house is, in some respects, an exhibition hall filled with wonders of thermodynamics (Fig. 1–4). Many ordinary household utensils and appliances are designed, in whole or in part, by using the principles of thermodynamics. Some examples include the electric or gas range, the heating and air-conditioning systems, the refrigerator, the humidifier, the pressure cooker, the water heater, the shower, the iron, and even the computer and the TV. On a larger scale, thermodynamics plays a major part in the design and analysis of automotive engines, rockets, jet engines, and conventional or nuclear power plants, solar collectors, and the design of vehicles from ordinary cars to airplanes (Fig. 1–5). The energy-efficient home that you may be living in, for example, is designed on the basis of minimizing heat loss in winter and heat gain in summer. The size, location, and the power input of the fan of your computer is also selected after an analysis that involves thermodynamics.

## 1–2 ■ IMPORTANCE OF DIMENSIONS AND UNITS

Any physical quantity can be characterized by **dimensions**. The magnitudes assigned to the dimensions are called **units**. Some basic dimensions such as mass  $m$ , length  $L$ , time  $t$ , and temperature  $T$  are selected as **primary** or **fundamental dimensions**, while others such as velocity  $V$ , energy  $E$ , and volume  $V$  are expressed in terms of the primary dimensions and are called **secondary dimensions**, or **derived dimensions**.

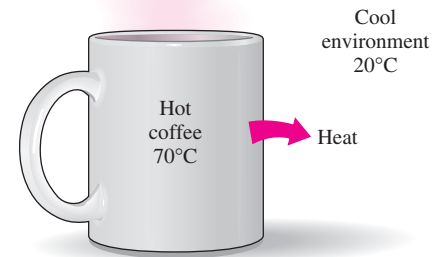


FIGURE 1–3

Heat flows in the direction of decreasing temperature.

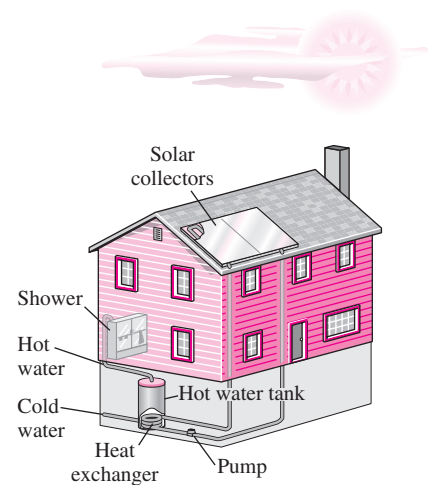


FIGURE 1–4

The design of many engineering systems, such as this solar hot water system, involves thermodynamics.



INTERACTIVE  
TUTORIAL

SEE TUTORIAL CH. 1, SEC. 2 ON THE DVD.




The human body



Air conditioning systems



Airplanes

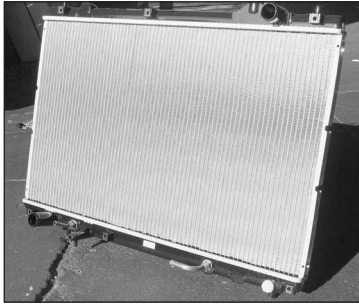

Car radiators



Power plants



Refrigeration systems

**FIGURE 1-5**

Some application areas of thermodynamics.

*A/C unit, fridge, radiator:* © The McGraw-Hill Companies, Inc./Jill Braaten, photographer; *Plane:* © Vol. 14/PhotoDisc; *Humans:* © Vol. 121/PhotoDisc; *Power plant:* © Corbis Royalty Free

A number of unit systems have been developed over the years. Despite strong efforts in the scientific and engineering community to unify the world with a single unit system, two sets of units are still in common use today: the **English system**, which is also known as the *United States Customary System* (USCS), and the metric **SI** (from *Le Système International d'Unités*), which is also known as the *International System*. The SI is a simple and logical system based on a decimal relationship between the various units, and it is being used for scientific and engineering work in most of the industrialized nations, including England. The English system, however, has no apparent systematic numerical base, and various units in this system are related to each other rather arbitrarily (12 in = 1 ft, 1 mile = 5280 ft, 4 qt = gal, etc.), which makes it confusing and difficult to learn. The United States is the only industrialized country that has not yet fully converted to the metric system.

The systematic efforts to develop a universally acceptable system of units dates back to 1790 when the French National Assembly charged the French Academy of Sciences to come up with such a unit system. An early version of the metric system was soon developed in France, but it

did not find universal acceptance until 1875 when *The Metric Convention Treaty* was prepared and signed by 17 nations, including the United States. In this international treaty, meter and gram were established as the metric units for length and mass, respectively, and a *General Conference of Weights and Measures* (CGPM) was established that was to meet every six years. In 1960, the CGPM produced the SI, which was based on six fundamental quantities, and their units were adopted in 1954 at the Tenth General Conference of Weights and Measures: *meter* (m) for length, *kilogram* (kg) for mass, *second* (s) for time, *ampere* (A) for electric current, *degree Kelvin* (°K) for temperature, and *candela* (cd) for luminous intensity (amount of light). In 1971, the CGPM added a seventh fundamental quantity and unit: *mole* (mol) for the amount of matter.

Based on the notational scheme introduced in 1967, the degree symbol was officially dropped from the absolute temperature unit, and all unit names were to be written without capitalization even if they were derived from proper names (Table 1–1). However, the abbreviation of a unit was to be capitalized if the unit was derived from a proper name. For example, the SI unit of force, which is named after Sir Isaac Newton (1647–1723), is *newton* (not Newton), and it is abbreviated as N. Also, the full name of a unit may be pluralized, but its abbreviation cannot. For example, the length of an object can be 5 m or 5 meters, *not* 5 ms or 5 meter. Finally, no period is to be used in unit abbreviations unless they appear at the end of a sentence. For example, the proper abbreviation of meter is m (not m.).

The recent move toward the metric system in the United States seems to have started in 1968 when Congress, in response to what was happening in the rest of the world, passed a Metric Study Act. Congress continued to promote a voluntary switch to the metric system by passing the Metric Conversion Act in 1975. A trade bill passed by Congress in 1988 set a September 1992 deadline for all federal agencies to convert to the metric system. However, the deadlines were relaxed later with no clear plans for the future.

The industries that are heavily involved in international trade (such as the automotive, soft drink, and liquor industries) have been quick in converting to the metric system for economic reasons (having a single worldwide design, fewer sizes, smaller inventories, etc.). Today, nearly all the cars manufactured in the United States are metric. Most car owners probably do not realize this until they try an English socket wrench on a metric bolt. Most industries, however, resisted the change, thus slowing down the conversion process.

Presently the United States is a dual-system society, and it will stay that way until the transition to the metric system is completed. This puts an extra burden on today's engineering students, since they are expected to retain their understanding of the English system while learning, thinking, and working in terms of the SI. Given the position of the engineers in the transition period, both unit systems are used in this text, with particular emphasis on SI units.

As pointed out, the SI is based on a decimal relationship between units. The prefixes used to express the multiples of the various units are listed in Table 1–2. They are standard for all units, and the student is encouraged to memorize them because of their widespread use (Fig. 1–6).

TABLE 1–1

The seven fundamental (or primary) dimensions and their units in SI

Dimension	Unit
Length	meter (m)
Mass	kilogram (kg)
Time	second (s)
Temperature	kelvin (K)
Electric current	ampere (A)
Amount of light	candela (cd)
Amount of matter	mole (mol)



TABLE 1–2

Standard prefixes in SI units

Multiple	Prefix
$10^{12}$	tera, T
$10^9$	giga, G
$10^6$	mega, M
$10^3$	kilo, k
$10^2$	hecto, h
$10^1$	deka, da
$10^{-1}$	deci, d
$10^{-2}$	centi, c
$10^{-3}$	milli, m
$10^{-6}$	micro, $\mu$
$10^{-9}$	nano, n
$10^{-12}$	pico, p


**FIGURE 1-6**

The SI unit prefixes are used in all branches of engineering.

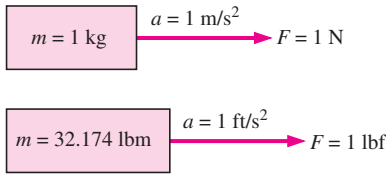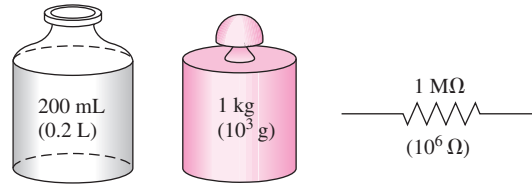

**FIGURE 1-7**

The definition of the force units.

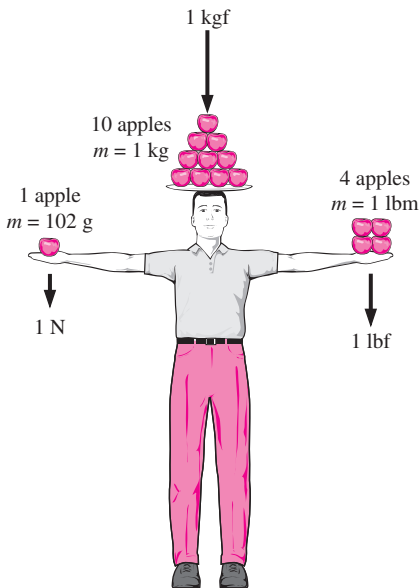

**FIGURE 1-8**

The relative magnitudes of the force units newton (N), kilogram-force (kgf), and pound-force (lbf).

### Some SI and English Units

In SI, the units of mass, length, and time are the kilogram (kg), meter (m), and second (s), respectively. The respective units in the English system are the pound-mass (lbm), foot (ft), and second (s). The pound symbol *lb* is actually the abbreviation of *libra*, which was the ancient Roman unit of weight. The English retained this symbol even after the end of the Roman occupation of Britain in 410. The mass and length units in the two systems are related to each other by

$$1 \text{ lbm} = 0.45359 \text{ kg}$$

$$1 \text{ ft} = 0.3048 \text{ m}$$

In the English system, force is usually considered to be one of the primary dimensions and is assigned a nonderived unit. This is a source of confusion and error that necessitates the use of a dimensional constant ( $g_c$ ) in many formulas. To avoid this nuisance, we consider force to be a secondary dimension whose unit is derived from Newton’s second law, that is,

$$\text{Force} = (\text{Mass})(\text{Acceleration})$$

or

$$F = ma \tag{1-1}$$

In SI, the force unit is the newton (N), and it is defined as the *force required to accelerate a mass of 1 kg at a rate of 1 m/s<sup>2</sup>*. In the English system, the force unit is the **pound-force** (lbf) and is defined as the *force required to accelerate a mass of 32.174 lbm (1 slug) at a rate of 1 ft/s<sup>2</sup>* (Fig. 1-7). That is,

$$1 \text{ N} = 1 \text{ kg} \cdot \text{m/s}^2$$

$$1 \text{ lbf} = 32.174 \text{ lbm} \cdot \text{ft/s}^2$$

A force of 1 N is roughly equivalent to the weight of a small apple ( $m = 102 \text{ g}$ ), whereas a force of 1 lbf is roughly equivalent to the weight of four medium apples ( $m_{\text{total}} = 454 \text{ g}$ ), as shown in Fig. 1-8. Another force unit in common use in many European countries is the *kilogram-force* (kgf), which is the weight of 1 kg mass at sea level ( $1 \text{ kgf} = 9.807 \text{ N}$ ).

The term **weight** is often incorrectly used to express mass, particularly by the “weight watchers.” Unlike mass, weight  $W$  is a *force*. It is the gravitational force applied to a body, and its magnitude is determined from Newton’s second law,

$$W = mg \quad (\text{N}) \tag{1-2}$$

where  $m$  is the mass of the body, and  $g$  is the local gravitational acceleration ( $g$  is  $9.807 \text{ m/s}^2$  or  $32.174 \text{ ft/s}^2$  at sea level and  $45^\circ$  latitude). An ordinary bathroom scale measures the gravitational force acting on a body. The weight of a unit volume of a substance is called the **specific weight**  $\gamma$  and is determined from  $\gamma = \rho g$ , where  $\rho$  is density.

The mass of a body remains the same regardless of its location in the universe. Its weight, however, changes with a change in gravitational acceleration. A body weighs less on top of a mountain since  $g$  decreases with altitude. On the surface of the moon, an astronaut weighs about one-sixth of what she or he normally weighs on earth (Fig. 1–9).

At sea level a mass of 1 kg weighs 9.807 N, as illustrated in Fig. 1–10. A mass of 1 lbm, however, weighs 1 lbf, which misleads people to believe that pound-mass and pound-force can be used interchangeably as pound (lb), which is a major source of error in the English system.

It should be noted that the *gravity force* acting on a mass is due to the *attraction* between the masses, and thus it is proportional to the magnitudes of the masses and inversely proportional to the square of the distance between them. Therefore, the gravitational acceleration  $g$  at a location depends on the *local density* of the earth's crust, the *distance* to the center of the earth, and to a lesser extent, the positions of the moon and the sun. The value of  $g$  varies with location from  $9.8295 \text{ m/s}^2$  at 4500 m below sea level to  $7.3218 \text{ m/s}^2$  at 100,000 m above sea level. However, at altitudes up to 30,000 m, the variation of  $g$  from the sea-level value of  $9.807 \text{ m/s}^2$  is less than 1 percent. Therefore, for most practical purposes, the gravitational acceleration can be assumed to be *constant* at  $9.81 \text{ m/s}^2$ . It is interesting to note that at locations below sea level, the value of  $g$  increases with distance from the sea level, reaches a maximum at about 4500 m, and then starts decreasing. (What do you think the value of  $g$  is at the center of the earth?)

The primary cause of confusion between mass and weight is that mass is usually measured *indirectly* by measuring the *gravity force* it exerts. This approach also assumes that the forces exerted by other effects such as air buoyancy and fluid motion are negligible. This is like measuring the distance to a star by measuring its red shift, or measuring the altitude of an airplane by measuring barometric pressure. Both of these are also indirect measurements. The correct *direct* way of measuring mass is to compare it to a known mass. This is cumbersome, however, and it is mostly used for calibration and measuring precious metals.

*Work*, which is a form of energy, can simply be defined as force times distance; therefore, it has the unit “newton-meter ( $\text{N} \cdot \text{m}$ ),” which is called a joule (J). That is,


$$1 \text{ J} = 1 \text{ N} \cdot \text{m} \quad (1-3)$$

A more common unit for energy in SI is the kilojoule ( $1 \text{ kJ} = 10^3 \text{ J}$ ). In the English system, the energy unit is the **Btu** (British thermal unit), which is defined as the energy required to raise the temperature of 1 lbm of water at  $68^\circ\text{F}$  by  $1^\circ\text{F}$ . In the metric system, the amount of energy needed to raise the temperature of 1 g of water at  $14.5^\circ\text{C}$  by  $1^\circ\text{C}$  is defined as 1 **calorie** (cal), and  $1 \text{ cal} = 4.1868 \text{ J}$ . The magnitudes of the kilojoule and Btu are almost identical ( $1 \text{ Btu} = 1.0551 \text{ kJ}$ ).



**FIGURE 1–9**

A body weighing 150 lbf on earth will weigh only 25 lbf on the moon.

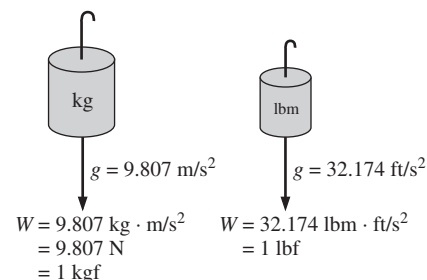

**FIGURE 1–10**

The weight of a unit mass at sea level.

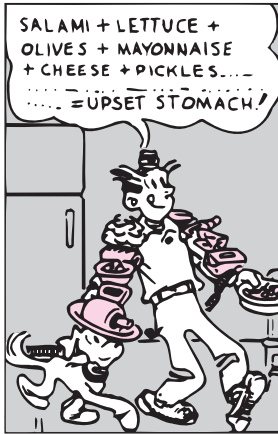


FIGURE 1–11

To be dimensionally homogeneous, all the terms in an equation must have the same unit.

© Reprinted with special permission of King Features Syndicate.

## Dimensional Homogeneity

We all know from grade school that apples and oranges do not add. But we somehow manage to do it (by mistake, of course). In engineering, all equations must be *dimensionally homogeneous*. That is, every term in an equation must have the same unit (Fig. 1–11). If, at some stage of an analysis, we find ourselves in a position to add two quantities that have different units, it is a clear indication that we have made an error at an earlier stage. So checking dimensions can serve as a valuable tool to spot errors.

### EXAMPLE 1–1 Spotting Errors from Unit Inconsistencies

While solving a problem, a person ended up with the following equation at some stage:

$$E = 25 \text{ kJ} + 7 \text{ kJ/kg}$$

where  $E$  is the total energy and has the unit of kilojoules. Determine how to correct the error and discuss what may have caused it.

**Solution** During an analysis, a relation with inconsistent units is obtained. A correction is to be found, and the probable cause of the error is to be determined.

**Analysis** The two terms on the right-hand side do not have the same units, and therefore they cannot be added to obtain the total energy. Multiplying the last term by mass will eliminate the kilograms in the denominator, and the whole equation will become dimensionally homogeneous; that is, every term in the equation will have the same unit.

**Discussion** Obviously this error was caused by forgetting to multiply the last term by mass at an earlier stage.

We all know from experience that units can give terrible headaches if they are not used carefully in solving a problem. However, with some attention and skill, units can be used to our advantage. They can be used to check formulas; they can even be used to derive formulas, as explained in the following example.

### EXAMPLE 1–2 Obtaining Formulas from Unit Considerations

A tank is filled with oil whose density is  $\rho = 850 \text{ kg/m}^3$ . If the volume of the tank is  $V = 2 \text{ m}^3$ , determine the amount of mass  $m$  in the tank.

**Solution** The volume of an oil tank is given. The mass of oil is to be determined.

**Assumptions** Oil is an incompressible substance and thus its density is constant.

**Analysis** A sketch of the system just described is given in Fig. 1–12. Suppose we forgot the formula that relates mass to density and volume. However, we know that mass has the unit of kilograms. That is, whatever calculations we do, we should end up with the unit of kilograms. Putting the given information into perspective, we have

$$\rho = 850 \text{ kg/m}^3 \quad \text{and} \quad V = 2 \text{ m}^3$$

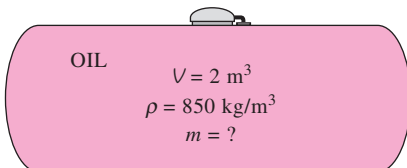


FIGURE 1–12

Schematic for Example 1–2.



It is obvious that we can eliminate  $m^3$  and end up with kg by multiplying these two quantities. Therefore, the formula we are looking for should be

$$m = \rho V$$

Thus,

$$m = (850 \text{ kg/m}^3)(2 \text{ m}^3) = \mathbf{1700 \text{ kg}}$$

**Discussion** Note that this approach may not work for more complicated formulas.

You should keep in mind that a formula that is not dimensionally homogeneous is definitely wrong, but a dimensionally homogeneous formula is not necessarily right.

## Unity Conversion Ratios

Just as all nonprimary dimensions can be formed by suitable combinations of primary dimensions, *all nonprimary units (secondary units) can be formed by combinations of primary units*. Force units, for example, can be expressed as

$$\text{N} = \text{kg} \frac{\text{m}}{\text{s}^2} \quad \text{and} \quad \text{lbf} = 32.174 \text{ lbm} \frac{\text{ft}}{\text{s}^2}$$

They can also be expressed more conveniently as **unity conversion ratios** as

$$\frac{\text{N}}{\text{kg} \cdot \text{m}/\text{s}^2} = 1 \quad \text{and} \quad \frac{\text{lbf}}{32.174 \text{ lbm} \cdot \text{ft}/\text{s}^2} = 1$$

Unity conversion ratios are identically equal to 1 and are unitless, and thus such ratios (or their inverses) can be inserted conveniently into any calculation to properly convert units. Students are encouraged to always use unity conversion ratios such as those given here when converting units. Some textbooks insert the archaic gravitational constant  $g_c$  defined as  $g_c = 32.174 \text{ lbm} \cdot \text{ft}/\text{lbf} \cdot \text{s}^2 = \text{kg} \cdot \text{m}/\text{N} \cdot \text{s}^2 = 1$  into equations in order to force units to match. This practice leads to unnecessary confusion and is strongly discouraged by the present authors. We recommend that students instead use unity conversion ratios.

### EXAMPLE 1-3 The Weight of One Pound-Mass

Using unity conversion ratios, show that 1.00 lbm weighs 1.00 lbf on earth (Fig. 1-13).

**Solution** A mass of 1.00 lbm is subjected to standard earth gravity. Its weight in lbf is to be determined.

**Assumptions** Standard sea-level conditions are assumed.

**Properties** The gravitational constant is  $g = 32.174 \text{ ft/s}^2$ .



**FIGURE 1-13**

A mass of 1 lbm weighs 1 lbf on earth.



FIGURE 1-14

A quirk in the metric system of units.



**INTERACTIVE TUTORIAL**

SEE TUTORIAL CH. 1, SEC. 3 ON THE DVD.




FIGURE 1-15

System, surroundings, and boundary.




FIGURE 1-16

Mass cannot cross the boundaries of a closed system, but energy can.

**Analysis** We apply Newton's second law to calculate the weight (force) that corresponds to the known mass and acceleration. The weight of any object is equal to its mass times the local value of gravitational acceleration. Thus,

$$W = mg = (1.00 \text{ lbm})(32.174 \text{ ft/s}^2) \left( \frac{1 \text{ lbf}}{32.174 \text{ lbm} \cdot \text{ft/s}^2} \right) = \mathbf{1.00 \text{ lbf}}$$

**Discussion** Mass is the same regardless of its location. However, on some other planet with a different value of gravitational acceleration, the weight of 1 lbm would differ from that calculated here.

When you buy a box of breakfast cereal, the printing may say “Net weight: One pound (454 grams).” (See Fig. 1–14.) Technically, this means that the cereal inside the box weighs 1.00 lbf on earth and has a *mass* of 453.6 g (0.4536 kg). Using Newton's second law, the actual weight of the cereal in the metric system is

$$W = mg = (453.6 \text{ g})(9.81 \text{ m/s}^2) \left( \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) \left( \frac{1 \text{ kg}}{1000 \text{ g}} \right) = 4.45 \text{ N}$$

### 1-3 ■ SYSTEMS AND CONTROL VOLUMES

A system is defined as a *quantity of matter or a region in space chosen for study*. The mass or region outside the system is called the **surroundings**. The real or imaginary surface that separates the system from its surroundings is called the **boundary**. These terms are illustrated in Fig. 1–15. The boundary of a system can be *fixed* or *movable*. Note that the boundary is the contact surface shared by both the system and the surroundings. Mathematically speaking, the boundary has zero thickness, and thus it can neither contain any mass nor occupy any volume in space.

Systems may be considered to be *closed* or *open*, depending on whether a fixed mass or a fixed volume in space is chosen for study. A **closed system** (also known as a **control mass**) consists of a fixed amount of mass, and no mass can cross its boundary. That is, no mass can enter or leave a closed system, as shown in Fig. 1–16. But energy, in the form of heat or work, can cross the boundary; and the volume of a closed system does not have to be fixed. If, as a special case, even energy is not allowed to cross the boundary, that system is called an **isolated system**.

Consider the piston-cylinder device shown in Fig. 1–17. Let us say that we would like to find out what happens to the enclosed gas when it is heated. Since we are focusing our attention on the gas, it is our system. The inner surfaces of the piston and the cylinder form the boundary, and since no mass is crossing this boundary, it is a closed system. Notice that energy may cross the boundary, and part of the boundary (the inner surface of the piston, in this case) may move. Everything outside the gas, including the piston and the cylinder, is the surroundings.

An **open system**, or a **control volume**, as it is often called, is a properly selected region in space. It usually encloses a device that involves mass flow such as a compressor, turbine, or nozzle. Flow through these


devices is best studied by selecting the region within the device as the control volume. Both mass and energy can cross the boundary of a control volume.

A large number of engineering problems involve mass flow in and out of a system and, therefore, are modeled as *control volumes*. A water heater, a car radiator, a turbine, and a compressor all involve mass flow and should be analyzed as control volumes (open systems) instead of as control masses (closed systems). In general, *any arbitrary region in space* can be selected as a control volume. There are no concrete rules for the selection of control volumes, but the proper choice certainly makes the analysis much easier. If we were to analyze the flow of air through a nozzle, for example, a good choice for the control volume would be the region within the nozzle.


The boundaries of a control volume are called a *control surface*, and they can be real or imaginary. In the case of a nozzle, the inner surface of the nozzle forms the real part of the boundary, and the entrance and exit areas form the imaginary part, since there are no physical surfaces there (Fig. 1–18a).

A control volume can be fixed in size and shape, as in the case of a nozzle, or it may involve a moving boundary, as shown in Fig. 1–18b. Most control volumes, however, have fixed boundaries and thus do not involve any moving boundaries. A control volume can also involve heat and work interactions just as a closed system, in addition to mass interaction.


As an example of an open system, consider the water heater shown in Fig. 1–19. Let us say that we would like to determine how much heat we must transfer to the water in the tank in order to supply a steady stream of hot water. Since hot water will leave the tank and be replaced by cold water, it is not convenient to choose a fixed mass as our system for the analysis. Instead, we can concentrate our attention on the volume formed by the interior surfaces of the tank and consider the hot and cold water streams as mass leaving and entering the control volume. The interior surfaces of the tank form the control surface for this case, and mass is crossing the control surface at two locations.

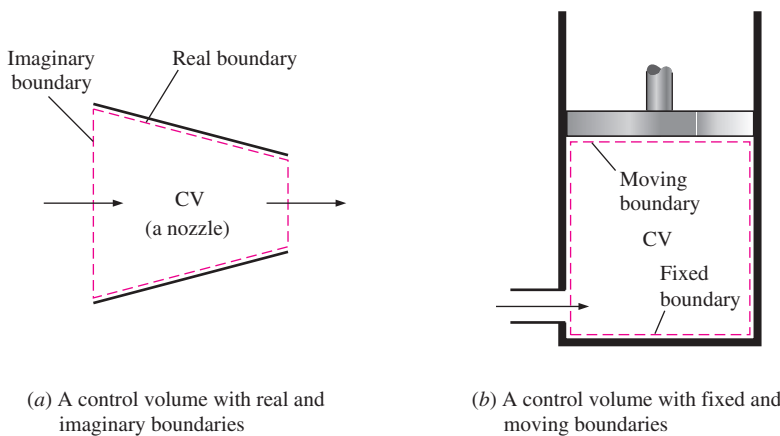

**FIGURE 1–18**  
A control volume can involve fixed, moving, real, and imaginary boundaries.

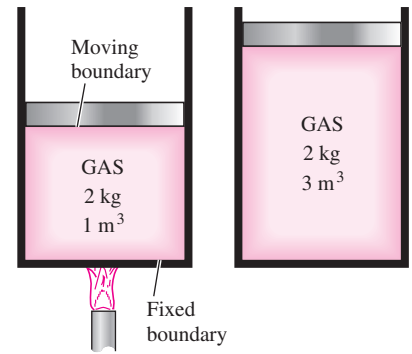

**FIGURE 1–17**  
A closed system with a moving boundary.

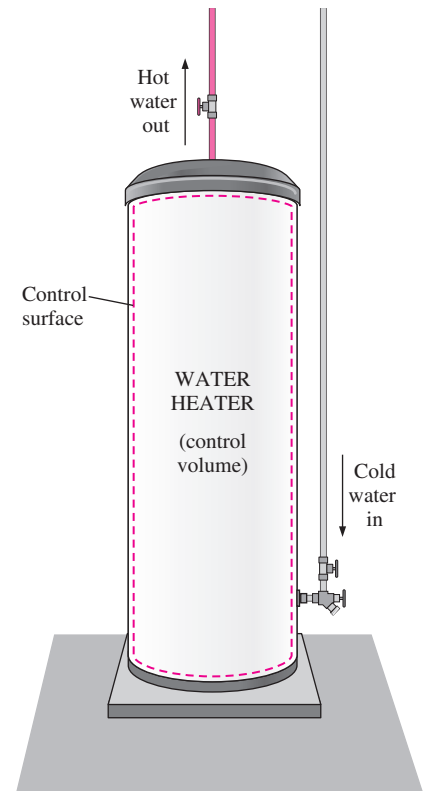

**FIGURE 1–19**  
An open system (a control volume) with one inlet and one exit.



INTERACTIVE  
TUTORIAL

SEE TUTORIAL CH. 1, SEC. 4 ON THE DVD.

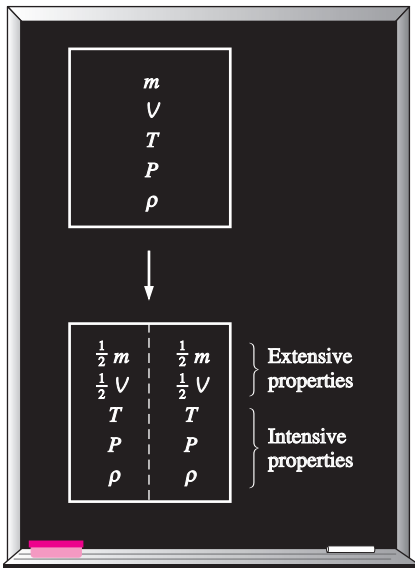


FIGURE 1-20

Criterion to differentiate intensive and extensive properties.

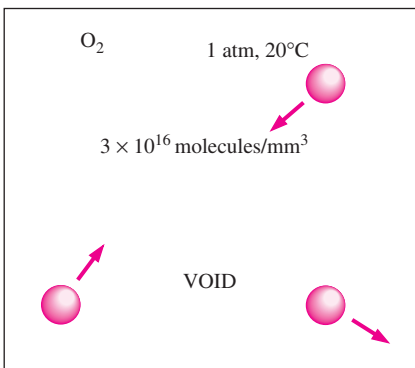


FIGURE 1-21

Despite the large gaps between molecules, a substance can be treated as a continuum because of the very large number of molecules even in an extremely small volume.

In an engineering analysis, the system under study *must* be defined carefully. In most cases, the system investigated is quite simple and obvious, and defining the system may seem like a tedious and unnecessary task. In other cases, however, the system under study may be rather involved, and a proper choice of the system may greatly simplify the analysis.

## 1-4 ■ PROPERTIES OF A SYSTEM

Any characteristic of a system is called a **property**. Some familiar properties are pressure  $P$ , temperature  $T$ , volume  $V$ , and mass  $m$ . The list can be extended to include less familiar ones such as viscosity, thermal conductivity, modulus of elasticity, thermal expansion coefficient, electric resistivity, and even velocity and elevation.

Properties are considered to be either *intensive* or *extensive*. **Intensive properties** are those that are independent of the mass of a system, such as temperature, pressure, and density. **Extensive properties** are those whose values depend on the size—or extent—of the system. Total mass, total volume, and total momentum are some examples of extensive properties. An easy way to determine whether a property is intensive or extensive is to divide the system into two equal parts with an imaginary partition, as shown in Fig. 1-20. Each part will have the same value of intensive properties as the original system, but half the value of the extensive properties.

Generally, uppercase letters are used to denote extensive properties (with mass  $m$  being a major exception), and lowercase letters are used for intensive properties (with pressure  $P$  and temperature  $T$  being the obvious exceptions).

Extensive properties per unit mass are called **specific properties**. Some examples of specific properties are specific volume ( $v = V/m$ ) and specific total energy ( $e = E/m$ ).

## Continuum

Matter is made up of atoms that are widely spaced in the gas phase. Yet it is very convenient to disregard the atomic nature of a substance and view it as a continuous, homogeneous matter with no holes, that is, a **continuum**. The continuum idealization allows us to treat properties as point functions and to assume the properties vary continually in space with no jump discontinuities. This idealization is valid as long as the size of the system we deal with is large relative to the space between the molecules. This is the case in practically all problems, except some specialized ones. The continuum idealization is implicit in many statements we make, such as “the density of water in a glass is the same at any point.”

To have a sense of the distance involved at the molecular level, consider a container filled with oxygen at atmospheric conditions. The diameter of the oxygen molecule is about  $3 \times 10^{-10}$  m and its mass is  $5.3 \times 10^{-26}$  kg. Also, the *mean free path* of oxygen at 1 atm pressure and  $20^\circ\text{C}$  is  $6.3 \times 10^{-8}$  m. That is, an oxygen molecule travels, on average, a distance of  $6.3 \times 10^{-8}$  m (about 200 times of its diameter) before it collides with another molecule.

Also, there are about  $3 \times 10^{16}$  molecules of oxygen in the tiny volume of  $1 \text{ mm}^3$  at 1 atm pressure and  $20^\circ\text{C}$  (Fig. 1-21). The continuum model is applicable as long as the characteristic length of the system (such as its

diameter) is much larger than the mean free path of the molecules. At very high vacuums or very high elevations, the mean free path may become large (for example, it is about 0.1 m for atmospheric air at an elevation of 100 km). For such cases the **rarefied gas flow theory** should be used, and the impact of individual molecules should be considered. In this text we will limit our consideration to substances that can be modeled as a continuum.

## 1-5 ■ DENSITY AND SPECIFIC GRAVITY

**Density** is defined as *mass per unit volume* (Fig. 1-22).

$$\text{Density:} \quad \rho = \frac{m}{V} \quad (\text{kg/m}^3) \quad (1-4)$$

The reciprocal of density is the **specific volume**  $\nu$ , which is defined as *volume per unit mass*. That is,

$$\nu = \frac{V}{m} = \frac{1}{\rho} \quad (1-5)$$

For a differential volume element of mass  $\delta m$  and volume  $\delta V$ , density can be expressed as  $\rho = \delta m / \delta V$ .

The density of a substance, in general, depends on temperature and pressure. The density of most gases is proportional to pressure and inversely proportional to temperature. Liquids and solids, on the other hand, are essentially incompressible substances, and the variation of their density with pressure is usually negligible. At 20°C, for example, the density of water changes from 998 kg/m<sup>3</sup> at 1 atm to 1003 kg/m<sup>3</sup> at 100 atm, a change of just 0.5 percent. The density of liquids and solids depends more strongly on temperature than it does on pressure. At 1 atm, for example, the density of water changes from 998 kg/m<sup>3</sup> at 20°C to 975 kg/m<sup>3</sup> at 75°C, a change of 2.3 percent, which can still be neglected in many engineering analyses.

Sometimes the density of a substance is given relative to the density of a well-known substance. Then it is called **specific gravity**, or **relative density**, and is defined as *the ratio of the density of a substance to the density of some standard substance at a specified temperature* (usually water at 4°C, for which  $\rho_{\text{H}_2\text{O}} = 1000 \text{ kg/m}^3$ ). That is,

$$\text{Specific gravity:} \quad \text{SG} = \frac{\rho}{\rho_{\text{H}_2\text{O}}} \quad (1-6)$$

Note that the specific gravity of a substance is a dimensionless quantity. However, in SI units, the numerical value of the specific gravity of a substance is exactly equal to its density in g/cm<sup>3</sup> or kg/L (or 0.001 times the density in kg/m<sup>3</sup>) since the density of water at 4°C is 1 g/cm<sup>3</sup> = 1 kg/L = 1000 kg/m<sup>3</sup>. The specific gravity of mercury at 0°C, for example, is 13.6. Therefore, its density at 0°C is 13.6 g/cm<sup>3</sup> = 13.6 kg/L = 13,600 kg/m<sup>3</sup>. The specific gravities of some substances at 0°C are given in Table 1-3. Note that substances with specific gravities less than 1 are lighter than water, and thus they would float on water.



**INTERACTIVE  
TUTORIAL**

SEE TUTORIAL CH. 1, SEC. 5 ON THE DVD.




**EXPERIMENT**



Use actual data from the experiment shown here to obtain the **density** of water in the neighborhood of 4°C. See end-of-chapter problem 1-129.

© Ronald Mullisen

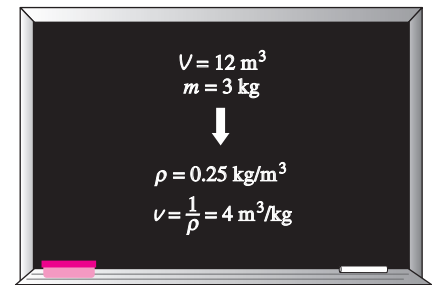

**FIGURE 1-22**

Density is mass per unit volume; specific volume is volume per unit mass.

TABLE 1–3

Specific gravities of some substances at 0°C

Substance	SG
Water	1.0
Blood	1.05
Seawater	1.025
Gasoline	0.7
Ethyl alcohol	0.79
Mercury	13.6
Wood	0.3–0.9
Gold	19.2
Bones	1.7–2.0
Ice	0.92
Air (at 1 atm)	0.0013



INTERACTIVE TUTORIAL

SEE TUTORIAL CH. 1, SEC. 6 ON THE DVD.

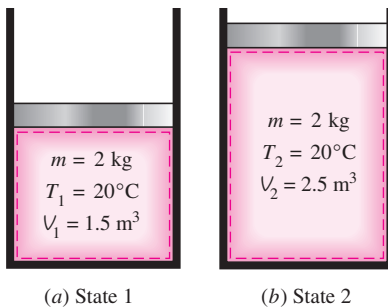


FIGURE 1–23

A system at two different states.

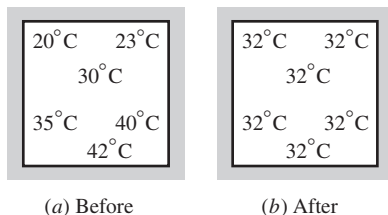


FIGURE 1–24

A closed system reaching thermal equilibrium.

The weight of a unit volume of a substance is called **specific weight** and is expressed as

$$\text{Specific weight: } \gamma_s = \rho g \quad (\text{N/m}^3) \quad (1-7)$$

where  $g$  is the gravitational acceleration.

The densities of liquids are essentially constant, and thus they can often be approximated as being incompressible substances during most processes without sacrificing much in accuracy.

## 1–6 ■ STATE AND EQUILIBRIUM

Consider a system not undergoing any change. At this point, all the properties can be measured or calculated throughout the entire system, which gives us a set of properties that completely describes the condition, or the **state**, of the system. At a given state, all the properties of a system have fixed values. If the value of even one property changes, the state will change to a different one. In Fig. 1–23 a system is shown at two different states.

Thermodynamics deals with *equilibrium* states. The word **equilibrium** implies a state of balance. In an equilibrium state there are no unbalanced potentials (or driving forces) within the system. A system in equilibrium experiences no changes when it is isolated from its surroundings.

There are many types of equilibrium, and a system is not in thermodynamic equilibrium unless the conditions of all the relevant types of equilibrium are satisfied. For example, a system is in **thermal equilibrium** if the temperature is the same throughout the entire system, as shown in Fig. 1–24. That is, the system involves no temperature differential, which is the driving force for heat flow. **Mechanical equilibrium** is related to pressure, and a system is in mechanical equilibrium if there is no change in pressure at any point of the system with time. However, the pressure may vary within the system with elevation as a result of gravitational effects. For example, the higher pressure at a bottom layer is balanced by the extra weight it must carry, and, therefore, there is no imbalance of forces. The variation of pressure as a result of gravity in most thermodynamic systems is relatively small and usually disregarded. If a system involves two phases, it is in **phase equilibrium** when the mass of each phase reaches an equilibrium level and stays there. Finally, a system is in **chemical equilibrium** if its chemical composition does not change with time, that is, no chemical reactions occur. A system will not be in equilibrium unless all the relevant equilibrium criteria are satisfied.

## The State Postulate

As noted earlier, the state of a system is described by its properties. But we know from experience that we do not need to specify all the properties in order to fix a state. Once a sufficient number of properties are specified, the rest of the properties assume certain values automatically. That is, specifying a certain number of properties is sufficient to fix a state. The number of properties required to fix the state of a system is given by the **state postulate**:

The state of a simple compressible system is completely specified by two independent, intensive properties.

A system is called a **simple compressible system** in the absence of electrical, magnetic, gravitational, motion, and surface tension effects. These effects are due to external force fields and are negligible for most engineering problems. Otherwise, an additional property needs to be specified for each effect that is significant. If the gravitational effects are to be considered, for example, the elevation  $z$  needs to be specified in addition to the two properties necessary to fix the state.

The state postulate requires that the two properties specified be independent to fix the state. Two properties are **independent** if one property can be varied while the other one is held constant. Temperature and specific volume, for example, are always independent properties, and together they can fix the state of a simple compressible system (Fig. 1–25). Temperature and pressure, however, are independent properties for single-phase systems, but are dependent properties for multiphase systems. At sea level ( $P = 1$  atm), water boils at  $100^\circ\text{C}$ , but on a mountaintop where the pressure is lower, water boils at a lower temperature. That is,  $T = f(P)$  during a phase-change process; thus, temperature and pressure are not sufficient to fix the state of a two-phase system. Phase-change processes are discussed in detail in Chap. 3.


## 1–7 ■ PROCESSES AND CYCLES

Any change that a system undergoes from one equilibrium state to another is called a **process**, and the series of states through which a system passes during a process is called the **path** of the process (Fig. 1–26). To describe a process completely, one should specify the initial and final states of the process, as well as the path it follows, and the interactions with the surroundings.

When a process proceeds in such a manner that the system remains infinitesimally close to an equilibrium state at all times, it is called a **quasi-static**, or **quasi-equilibrium**, process. A quasi-equilibrium process can be viewed as a sufficiently slow process that allows the system to adjust itself internally so that properties in one part of the system do not change any faster than those at other parts.

This is illustrated in Fig. 1–27. When a gas in a piston-cylinder device is compressed suddenly, the molecules near the face of the piston will not have enough time to escape and they will have to pile up in a small region in front of the piston, thus creating a high-pressure region there. Because of this pressure difference, the system can no longer be said to be in equilibrium, and this makes the entire process nonquasi-equilibrium. However, if the piston is moved slowly, the molecules will have sufficient time to redistribute and there will not be a molecule pileup in front of the piston. As a result, the pressure inside the cylinder will always be nearly uniform and will rise at the same rate at all locations. Since equilibrium is maintained at all times, this is a quasi-equilibrium process.

It should be pointed out that a quasi-equilibrium process is an idealized process and is not a true representation of an actual process. But many actual processes closely approximate it, and they can be modeled as quasi-equilibrium with negligible error. Engineers are interested in quasiequilibrium processes for two reasons. First, they are easy to analyze; second,




**FIGURE 1–25**

The state of nitrogen is fixed by two independent, intensive properties.




**INTERACTIVE TUTORIAL**

SEE TUTORIAL CH. 1, SEC. 7 ON THE DVD.

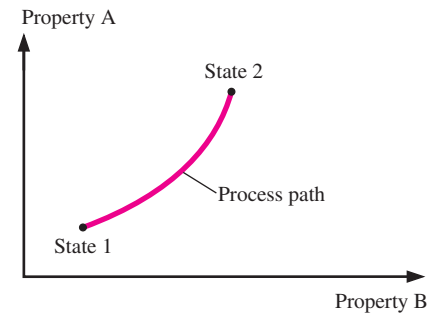


**FIGURE 1–26**

A process between states 1 and 2 and the process path.

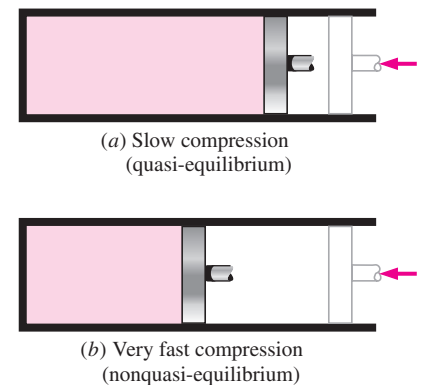


**FIGURE 1–27**

Quasi-equilibrium and nonquasi-equilibrium compression processes.

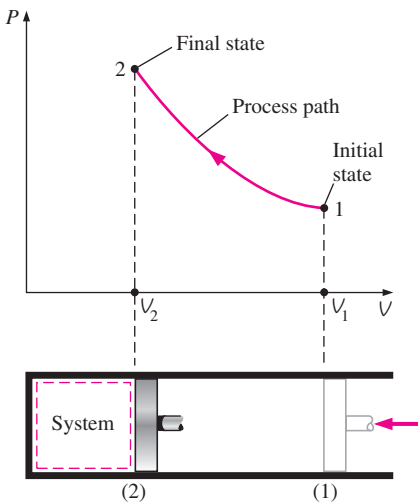

**FIGURE 1-28**

The  $P$ - $V$  diagram of a compression process.

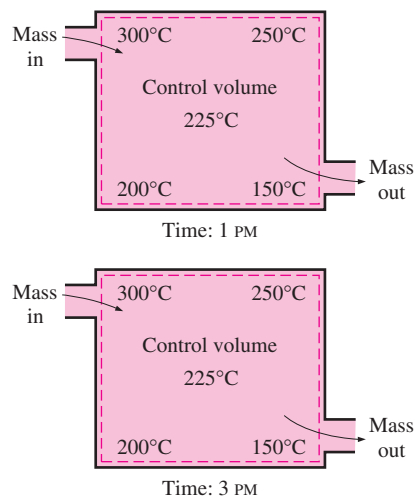

**FIGURE 1-29**

During a steady-flow process, fluid properties within the control volume may change with position but not with time.

work-producing devices deliver the most work when they operate on quasi-equilibrium processes. Therefore, quasi-equilibrium processes serve as standards to which actual processes can be compared.

Process diagrams plotted by employing thermodynamic properties as coordinates are very useful in visualizing the processes. Some common properties that are used as coordinates are temperature  $T$ , pressure  $P$ , and volume  $V$  (or specific volume  $v$ ). Figure 1-28 shows the  $P$ - $V$  diagram of a compression process of a gas.

Note that the process path indicates a series of equilibrium states through which the system passes during a process and has significance for quasi-equilibrium processes only. For nonquasi-equilibrium processes, we are not able to characterize the entire system by a single state, and thus we cannot speak of a process path for a system as a whole. A nonquasi-equilibrium process is denoted by a dashed line between the initial and final states instead of a solid line.

The prefix *iso-* is often used to designate a process for which a particular property remains constant. An **isothermal process**, for example, is a process during which the temperature  $T$  remains constant; an **isobaric process** is a process during which the pressure  $P$  remains constant; and an **isochoric** (or **isometric**) **process** is a process during which the specific volume  $v$  remains constant.

A system is said to have undergone a **cycle** if it returns to its initial state at the end of the process. That is, for a cycle the initial and final states are identical.

## The Steady-Flow Process

The terms *steady* and *uniform* are used frequently in engineering, and thus it is important to have a clear understanding of their meanings. The term *steady* implies *no change with time*. The opposite of steady is *unsteady*, or *transient*. The term *uniform*, however, implies *no change with location* over a specified region. These meanings are consistent with their everyday use (steady girlfriend, uniform properties, etc.).

A large number of engineering devices operate for long periods of time under the same conditions, and they are classified as *steady-flow devices*. Processes involving such devices can be represented reasonably well by a somewhat idealized process, called the **steady-flow process**, which can be defined as a *process during which a fluid flows through a control volume steadily* (Fig. 1-29). That is, the fluid properties can change from point to point within the control volume, but at any fixed point they remain the same during the entire process. Therefore, the volume  $V$ , the mass  $m$ , and the total energy content  $E$  of the control volume remain constant during a steady-flow process (Fig. 1-30).

Steady-flow conditions can be closely approximated by devices that are intended for continuous operation such as turbines, pumps, boilers, condensers, and heat exchangers or power plants or refrigeration systems. Some cyclic devices, such as reciprocating engines or compressors, do not satisfy any of the conditions stated above since the flow at the inlets and the exits will be pulsating and not steady. However, the fluid properties vary with



time in a periodic manner, and the flow through these devices can still be analyzed as a steady-flow process by using time-averaged values for the properties.

## 1-8 ■ TEMPERATURE AND THE ZEROth LAW OF THERMODYNAMICS

Although we are familiar with temperature as a measure of “hotness” or “coldness,” it is not easy to give an exact definition for it. Based on our physiological sensations, we express the level of temperature qualitatively with words like *freezing cold*, *cold*, *warm*, *hot*, and *red-hot*. However, we cannot assign numerical values to temperatures based on our sensations alone. Furthermore, our senses may be misleading. A metal chair, for example, will feel much colder than a wooden one even when both are at the same temperature.

Fortunately, several properties of materials change with temperature in a *repeatable* and *predictable* way, and this forms the basis for accurate temperature measurement. The commonly used mercury-in-glass thermometer, for example, is based on the expansion of mercury with temperature. Temperature is also measured by using several other temperature-dependent properties.

It is a common experience that a cup of hot coffee left on the table eventually cools off and a cold drink eventually warms up. That is, when a body is brought into contact with another body that is at a different temperature, heat is transferred from the body at higher temperature to the one at lower temperature until both bodies attain the same temperature (Fig. 1-31). At that point, the heat transfer stops, and the two bodies are said to have reached **thermal equilibrium**. The equality of temperature is the only requirement for thermal equilibrium.

The **zeroth law of thermodynamics** states that if two bodies are in thermal equilibrium with a third body, they are also in thermal equilibrium with each other. It may seem silly that such an obvious fact is called one of the basic laws of thermodynamics. However, it cannot be concluded from the other laws of thermodynamics, and it serves as a basis for the validity of temperature measurement. By replacing the third body with a thermometer, the zeroth law can be restated as *two bodies are in thermal equilibrium if both have the same temperature reading even if they are not in contact*.

The zeroth law was first formulated and labeled by R. H. Fowler in 1931. As the name suggests, its value as a fundamental physical principle was recognized more than half a century after the formulation of the first and the second laws of thermodynamics. It was named the zeroth law since it should have preceded the first and the second laws of thermodynamics.

## Temperature Scales

Temperature scales enable us to use a common basis for temperature measurements, and several have been introduced throughout history. All temperature scales are based on some easily reproducible states such as the freezing and boiling points of water, which are also called the *ice point* and

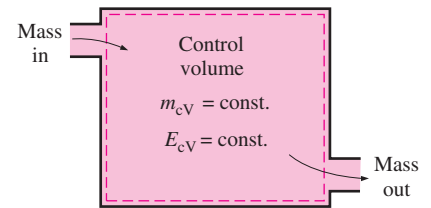


FIGURE 1-30

Under steady-flow conditions, the mass and energy contents of a control volume remain constant.



INTERACTIVE  
TUTORIAL

SEE TUTORIAL CH. 1, SEC. 8 ON THE DVD.

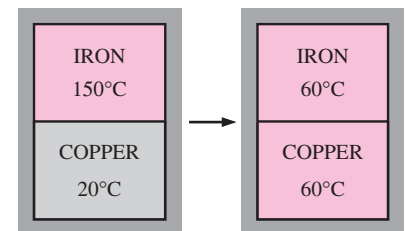


FIGURE 1-31

Two bodies reaching thermal equilibrium after being brought into contact in an isolated enclosure.

the *steam point*, respectively. A mixture of ice and water that is in equilibrium with air saturated with vapor at 1 atm pressure is said to be at the ice point, and a mixture of liquid water and water vapor (with no air) in equilibrium at 1 atm pressure is said to be at the steam point.

The temperature scales used in the SI and in the English system today are the **Celsius scale** (formerly called the *centigrade scale*; in 1948 it was renamed after the Swedish astronomer A. Celsius, 1702–1744, who devised it) and the **Fahrenheit scale** (named after the German instrument maker G. Fahrenheit, 1686–1736), respectively. On the Celsius scale, the ice and steam points were originally assigned the values of 0 and 100°C, respectively. The corresponding values on the Fahrenheit scale are 32 and 212°F. These are often referred to as *two-point scales* since temperature values are assigned at two different points.

In thermodynamics, it is very desirable to have a temperature scale that is independent of the properties of any substance or substances. Such a temperature scale is called a **thermodynamic temperature scale**, which is developed later in conjunction with the second law of thermodynamics. The thermodynamic temperature scale in the SI is the **Kelvin scale**, named after Lord Kelvin (1824–1907). The temperature unit on this scale is the **kelvin**, which is designated by K (not °K; the degree symbol was officially dropped from kelvin in 1967). The lowest temperature on the Kelvin scale is absolute zero, or 0 K. Then it follows that only one nonzero reference point needs to be assigned to establish the slope of this linear scale. Using nonconventional refrigeration techniques, scientists have approached absolute zero kelvin (they achieved 0.000000002 K in 1989).

The thermodynamic temperature scale in the English system is the **Rankine scale**, named after William Rankine (1820–1872). The temperature unit on this scale is the **rankine**, which is designated by R.

A temperature scale that turns out to be nearly identical to the Kelvin scale is the **ideal-gas temperature scale**. The temperatures on this scale are measured using a **constant-volume gas thermometer**, which is basically a rigid vessel filled with a gas, usually hydrogen or helium, at low pressure. This thermometer is based on the principle that *at low pressures, the temperature of a gas is proportional to its pressure at constant volume*. That is, the temperature of a gas of fixed volume varies *linearly* with pressure at sufficiently low pressures. Then the relationship between the temperature and the pressure of the gas in the vessel can be expressed as

$$T = a + bP \quad (1-8)$$

where the values of the constants  $a$  and  $b$  for a gas thermometer are determined experimentally. Once  $a$  and  $b$  are known, the temperature of a medium can be calculated from this relation by immersing the rigid vessel of the gas thermometer into the medium and measuring the gas pressure when thermal equilibrium is established between the medium and the gas in the vessel whose volume is held constant.

An ideal-gas temperature scale can be developed by measuring the pressures of the gas in the vessel at two reproducible points (such as the ice and the steam points) and assigning suitable values to temperatures at those two points. Considering that only one straight line passes through two fixed

points on a plane, these two measurements are sufficient to determine the constants  $a$  and  $b$  in Eq. 1–8. Then the unknown temperature  $T$  of a medium corresponding to a pressure reading  $P$  can be determined from that equation by a simple calculation. The values of the constants will be different for each thermometer, depending on the type and the amount of the gas in the vessel, and the temperature values assigned at the two reference points. If the ice and steam points are assigned the values  $0^\circ\text{C}$  and  $100^\circ\text{C}$ , respectively, then the gas temperature scale will be identical to the Celsius scale. In this case the value of the constant  $a$  (which corresponds to an absolute pressure of zero) is determined to be  $-273.15^\circ\text{C}$  regardless of the type and the amount of the gas in the vessel of the gas thermometer. That is, on a  $P$ - $T$  diagram, all the straight lines passing through the data points in this case will intersect the temperature axis at  $-273.15^\circ\text{C}$  when extrapolated, as shown in Fig. 1–32. This is the lowest temperature that can be obtained by a gas thermometer, and thus we can obtain an *absolute gas temperature scale* by assigning a value of zero to the constant  $a$  in Eq. 1–8. In that case Eq. 1–8 reduces to  $T = bP$ , and thus we need to specify the temperature at only *one* point to define an absolute gas temperature scale.

It should be noted that the absolute gas temperature scale is not a thermodynamic temperature scale, since it cannot be used at very low temperatures (due to condensation) and at very high temperatures (due to dissociation and ionization). However, absolute gas temperature is identical to the thermodynamic temperature in the temperature range in which the gas thermometer can be used, and thus we can view the thermodynamic temperature scale at this point as an absolute gas temperature scale that utilizes an “ideal” or “imaginary” gas that always acts as a low-pressure gas regardless of the temperature. If such a gas thermometer existed, it would read zero kelvin at absolute zero pressure, which corresponds to  $-273.15^\circ\text{C}$  on the Celsius scale (Fig. 1–33).

The Kelvin scale is related to the Celsius scale by

$$T(\text{K}) = T(^{\circ}\text{C}) + 273.15 \quad (1-9)$$

The Rankine scale is related to the Fahrenheit scale by

$$T(\text{R}) = T(^{\circ}\text{F}) + 459.67 \quad (1-10)$$

It is common practice to round the constant in Eq. 1–9 to 273 and that in Eq. 1–10 to 460.

The temperature scales in the two unit systems are related by

$$T(\text{R}) = 1.8T(\text{K}) \quad (1-11)$$

$$T(^{\circ}\text{F}) = 1.8T(^{\circ}\text{C}) + 32 \quad (1-12)$$

A comparison of various temperature scales is given in Fig. 1–34.

The reference temperature chosen in the original Kelvin scale was 273.15 K (or  $0^\circ\text{C}$ ), which is the temperature at which water freezes (or ice melts) and water exists as a solid–liquid mixture in equilibrium under standard atmospheric pressure (the *ice point*). At the Tenth General Conference on Weights and Measures in 1954, the reference point was changed to a much more precisely reproducible point, the *triple point* of water (the state at which all three phases of water coexist in equilibrium), which is

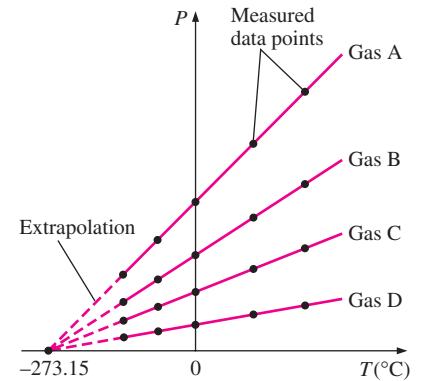


FIGURE 1–32

$P$  versus  $T$  plots of the experimental data obtained from a constant-volume gas thermometer using four different gases at different (but low) pressures.


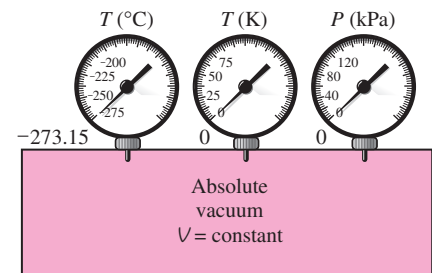


FIGURE 1–33

A constant-volume gas thermometer would read  $-273.15^\circ\text{C}$  at absolute zero pressure.

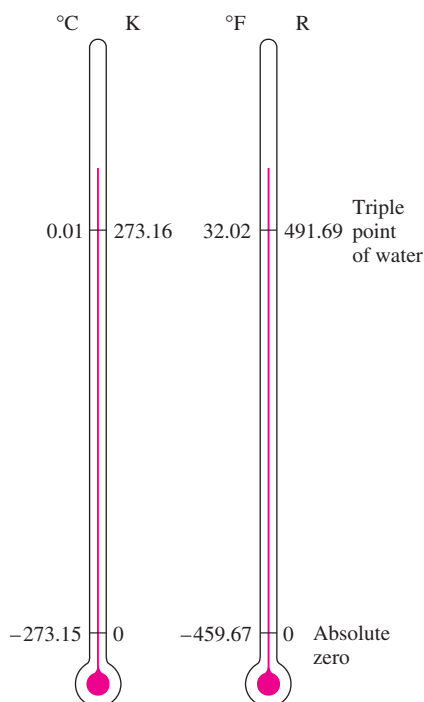

**FIGURE 1-34**  
Comparison of temperature scales.

assigned the value 273.16 K. The Celsius scale was also redefined at this conference in terms of the ideal-gas temperature scale and a single fixed point, which is again the triple point of water with an assigned value of  $0.01^{\circ}\text{C}$ . The boiling temperature of water (the *steam point*) was experimentally determined to be again  $100.00^{\circ}\text{C}$ , and thus the new and old Celsius scales were in good agreement.

## The International Temperature Scale of 1990 (ITS-90)

The *International Temperature Scale of 1990*, which supersedes the International Practical Temperature Scale of 1968 (IPTS-68), 1948 (IPTS-48), and 1927 (ITS-27), was adopted by the International Committee of Weights and Measures at its meeting in 1989 at the request of the Eighteenth General Conference on Weights and Measures. The ITS-90 is similar to its predecessors except that it is more refined with updated values of fixed temperatures, has an extended range, and conforms more closely to the thermodynamic temperature scale. On this scale, the unit of thermodynamic temperature  $T$  is again the kelvin (K), defined as the fraction  $1/273.16$  of the thermodynamic temperature of the triple point of water, which is sole defining fixed point of both the ITS-90 and the Kelvin scale and is the most important thermometric fixed point used in the calibration of thermometers to ITS-90.

The unit of Celsius temperature is the degree Celsius ( $^{\circ}\text{C}$ ), which is by definition equal in magnitude to the kelvin (K). A temperature difference may be expressed in kelvins or degrees Celsius. The ice point remains the same at  $0^{\circ}\text{C}$  ( $273.15^{\circ}\text{C}$ ) in both ITS-90 and IPTS-68, but the steam point is  $99.975^{\circ}\text{C}$  in ITS-90 (with an uncertainty of  $\pm 0.005^{\circ}\text{C}$ ) whereas it was  $100.000^{\circ}\text{C}$  in IPTS-68. The change is due to precise measurements made by gas thermometry by paying particular attention to the effect of sorption (the impurities in a gas absorbed by the walls of the bulb at the reference temperature being desorbed at higher temperatures, causing the measured gas pressure to increase).

The ITS-90 extends upward from 0.65 K to the highest temperature practically measurable in terms of the Planck radiation law using monochromatic radiation. It is based on specifying definite temperature values on a number of fixed and easily reproducible points to serve as benchmarks and expressing the variation of temperature in a number of ranges and subranges in functional form.


In ITS-90, the temperature scale is considered in four ranges. In the range of 0.65 to 5 K, the temperature scale is defined in terms of the vapor pressure—temperature relations for  $^3\text{He}$  and  $^4\text{He}$ . Between 3 and 24.5561 K (the triple point of neon), it is defined by means of a properly calibrated helium gas thermometer. From 13.8033 K (the triple point of hydrogen) to 1234.93 K (the freezing point of silver), it is defined by means of platinum resistance thermometers calibrated at specified sets of defining fixed points. Above 1234.93 K, it is defined in terms of the Planck radiation law and a suitable defining fixed point such as the freezing point of gold (1337.33 K).

We emphasize that the magnitudes of each division of 1 K and 1°C are identical (Fig. 1–35). Therefore, when we are dealing with temperature differences  $\Delta T$ , the temperature interval on both scales is the same. Raising the temperature of a substance by 10°C is the same as raising it by 10 K. That is,

$$\Delta T(\text{K}) = \Delta T(^{\circ}\text{C}) \quad (1-13)$$

$$\Delta T(\text{R}) = \Delta T(^{\circ}\text{F}) \quad (1-14)$$

Some thermodynamic relations involve the temperature  $T$  and often the question arises of whether it is in K or °C. If the relation involves temperature differences (such as  $a = b\Delta T$ ), it makes no difference and either can be used. However, if the relation involves temperatures only instead of temperature differences (such as  $a = bT$ ) then K must be used. When in doubt, it is always safe to use K because there are virtually no situations in which the use of K is incorrect, but there are many thermodynamic relations that will yield an erroneous result if °C is used.



**FIGURE 1–35**

Comparison of magnitudes of various temperature units.

### EXAMPLE 1–4 Expressing Temperature Rise in Different Units

During a heating process, the temperature of a system rises by 10°C. Express this rise in temperature in K, °F, and R.

**Solution** The temperature rise of a system is to be expressed in different units.

**Analysis** This problem deals with temperature changes, which are identical in Kelvin and Celsius scales. Then,

$$\Delta T(\text{K}) = \Delta T(^{\circ}\text{C}) = \mathbf{10\text{ K}}$$

The temperature changes in Fahrenheit and Rankine scales are also identical and are related to the changes in Celsius and Kelvin scales through Eqs. 1–11 and 1–14:

$$\Delta T(\text{R}) = 1.8 \Delta T(\text{K}) = (1.8)(10) = \mathbf{18\text{ R}}$$

and

$$\Delta T(^{\circ}\text{F}) = \Delta T(\text{R}) = \mathbf{18^{\circ}\text{F}}$$

**Discussion** Note that the units °C and K are interchangeable when dealing with temperature differences.

## 1–9 ■ PRESSURE

**Pressure** is defined as *a normal force exerted by a fluid per unit area*. We speak of pressure only when we deal with a gas or a liquid. The counterpart of pressure in solids is *normal stress*. Since pressure is defined as force per unit area, it has the unit of newtons per square meter ( $\text{N}/\text{m}^2$ ), which is called a **pascal** (Pa). That is,

$$1\text{ Pa} = 1\text{ N}/\text{m}^2$$



**INTERACTIVE  
TUTORIAL**

SEE TUTORIAL CH. 1, SEC. 9 ON THE DVD.

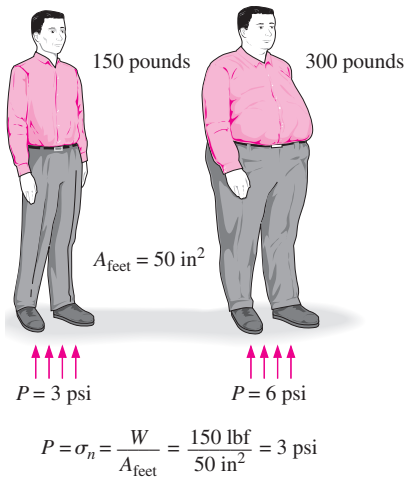


FIGURE 1-36

The normal stress (or “pressure”) on the feet of a chubby person is much greater than on the feet of a slim person.



FIGURE 1-37

Some basic pressure gages.

Dresser Instruments, Dresser, Inc.  
Used by permission.

The pressure unit pascal is too small for pressures encountered in practice. Therefore, its multiples *kilopascal* (1 kPa = 10<sup>3</sup> Pa) and *megapascal* (1 MPa = 10<sup>6</sup> Pa) are commonly used. Three other pressure units commonly used in practice, especially in Europe, are *bar*, *standard atmosphere*, and *kilogram-force per square centimeter*:

$$1 \text{ bar} = 10^5 \text{ Pa} = 0.1 \text{ MPa} = 100 \text{ kPa}$$

$$1 \text{ atm} = 101,325 \text{ Pa} = 101.325 \text{ kPa} = 1.01325 \text{ bars}$$

$$\begin{aligned}
 1 \text{ kgf/cm}^2 &= 9.807 \text{ N/cm}^2 = 9.807 \times 10^4 \text{ N/m}^2 = 9.807 \times 10^4 \text{ Pa} \\
 &= 0.9807 \text{ bar} \\
 &= 0.9679 \text{ atm}
 \end{aligned}$$

Note that the pressure units bar, atm, and kgf/cm<sup>2</sup> are almost equivalent to each other. In the English system, the pressure unit is *pound-force per square inch* (lbf/in<sup>2</sup>, or psi), and 1 atm = 14.696 psi. The pressure units kgf/cm<sup>2</sup> and lbf/in<sup>2</sup> are also denoted by kg/cm<sup>2</sup> and lb/in<sup>2</sup>, respectively, and they are commonly used in tire gages. It can be shown that 1 kgf/cm<sup>2</sup> = 14.223 psi.

Pressure is also used for solids as synonymous to *normal stress*, which is force acting perpendicular to the surface per unit area. For example, a 150-pound person with a total foot imprint area of 50 in<sup>2</sup> exerts a pressure of 150 lbf/50 in<sup>2</sup> = 3.0 psi on the floor (Fig. 1-36). If the person stands on one foot, the pressure doubles. If the person gains excessive weight, he or she is likely to encounter foot discomfort because of the increased pressure on the foot (the size of the foot does not change with weight gain). This also explains how a person can walk on fresh snow without sinking by wearing large snowshoes, and how a person cuts with little effort when using a sharp knife.

The actual pressure at a given position is called the **absolute pressure**, and it is measured relative to absolute vacuum (i.e., absolute zero pressure). Most pressure-measuring devices, however, are calibrated to read zero in the atmosphere (Fig. 1-37), and so they indicate the difference between the absolute pressure and the local atmospheric pressure. This difference is called the **gage pressure**. Pressures below atmospheric pressure are called **vacuum pressures** and are measured by vacuum gages that indicate the difference between the atmospheric pressure and the absolute pressure. Absolute, gage, and vacuum pressures are all positive quantities and are related to each other by


$$P_{\text{gage}} = P_{\text{abs}} - P_{\text{atm}} \tag{1-15}$$

$$P_{\text{vac}} = P_{\text{atm}} - P_{\text{abs}} \tag{1-16}$$

This is illustrated in Fig. 1-38.

Like other pressure gages, the gage used to measure the air pressure in an automobile tire reads the gage pressure. Therefore, the common reading of 32 psi (2.25 kgf/cm<sup>2</sup>) indicates a pressure of 32 psi above the atmospheric pressure. At a location where the atmospheric pressure is 14.3 psi, for example, the absolute pressure in the tire is 32 + 14.3 = 46.3 psi.

In thermodynamic relations and tables, absolute pressure is almost always used. Throughout this text, the pressure *P* will denote *absolute pressure* unless specified otherwise. Often the letters “a” (for absolute pressure) and “g” (for gage pressure) are added to pressure units (such as psia and psig) to clarify what is meant.

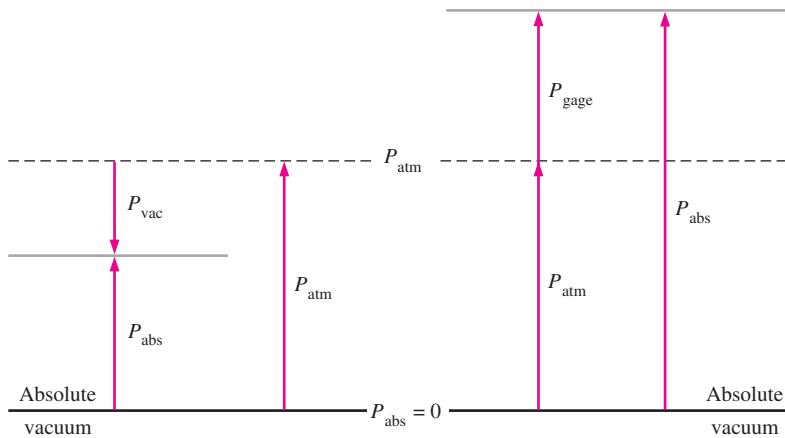

**FIGURE 1–38**

Absolute, gage, and vacuum pressures.

**EXAMPLE 1–5 Absolute Pressure of a Vacuum Chamber**

A vacuum gage connected to a chamber reads 5.8 psi at a location where the atmospheric pressure is 14.5 psi. Determine the absolute pressure in the chamber.

**Solution** The gage pressure of a vacuum chamber is given. The absolute pressure in the chamber is to be determined.

**Analysis** The absolute pressure is easily determined from Eq. 1–16 to be


$$P_{\text{abs}} = P_{\text{atm}} - P_{\text{vac}} = 14.5 - 5.8 = \mathbf{8.7 \text{ psi}}$$

**Discussion** Note that the local value of the atmospheric pressure is used when determining the absolute pressure.

Pressure is the *compressive force* per unit area, and it gives the impression of being a vector. However, pressure at any point in a fluid is the same in all directions. That is, it has magnitude but not a specific direction, and thus it is a scalar quantity.


## Variation of Pressure with Depth

It will come as no surprise to you that pressure in a fluid at rest does not change in the horizontal direction. This can be shown easily by considering a thin horizontal layer of fluid and doing a force balance in any horizontal direction. However, this is not the case in the vertical direction in a gravity field. Pressure in a fluid increases with depth because more fluid rests on deeper layers, and the effect of this “extra weight” on a deeper layer is balanced by an increase in pressure (Fig. 1–39).




**FIGURE 1–39**

The pressure of a fluid at rest increases with depth (as a result of added weight).

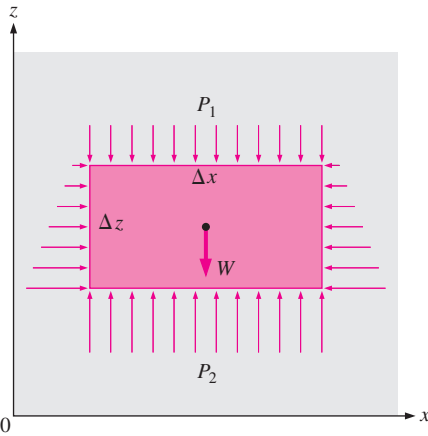
**FIGURE 1–40**

Free-body diagram of a rectangular fluid element in equilibrium.

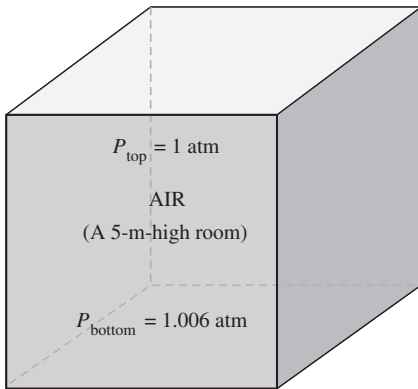
**FIGURE 1–41**

In a room filled with a gas, the variation of pressure with height is negligible.

To obtain a relation for the variation of pressure with depth, consider a rectangular fluid element of height  $\Delta z$ , length  $\Delta x$ , and unit depth (into the page) in equilibrium, as shown in Fig. 1–40. Assuming the density of the fluid  $\rho$  to be constant, a force balance in the vertical  $z$ -direction gives

$$\sum F_z = ma_z = 0: \quad P_2 \Delta x - P_1 \Delta x - \rho g \Delta x \Delta z = 0 \quad (1-17)$$

where  $W = mg = \rho g \Delta x \Delta z$  is the weight of the fluid element. Dividing by  $\Delta x$  and rearranging gives

$$\Delta P = P_2 - P_1 = \rho g \Delta z = \gamma_s \Delta z \quad (1-18)$$

where  $\gamma_s = \rho g$  is the *specific weight* of the fluid. Thus, we conclude that the pressure difference between two points in a constant density fluid is proportional to the vertical distance  $\Delta z$  between the points and the density  $\rho$  of the fluid. In other words, pressure in a fluid increases linearly with depth. This is what a diver experiences when diving deeper in a lake. For a given fluid, the vertical distance  $\Delta z$  is sometimes used as a measure of pressure, and it is called the *pressure head*.

We also conclude from Eq. 1–18 that for small to moderate distances, the variation of pressure with height is negligible for gases because of their low density. The pressure in a tank containing a gas, for example, can be considered to be uniform since the weight of the gas is too small to make a significant difference. Also, the pressure in a room filled with air can be assumed to be constant (Fig. 1–41).

If we take point 1 to be at the free surface of a liquid open to the atmosphere (Fig. 1–42), where the pressure is the atmospheric pressure  $P_{\text{atm}}$ , then the pressure at a depth  $h$  from the free surface becomes

$$P = P_{\text{atm}} + \rho gh \quad \text{or} \quad P_{\text{gage}} = \rho gh \quad (1-19)$$

Liquids are essentially incompressible substances, and thus the variation of density with depth is negligible. This is also the case for gases when the elevation change is not very large. The variation of density of liquids or gases with temperature can be significant, however, and may need to be considered when high accuracy is desired. Also, at great depths such as those encountered in oceans, the change in the density of a liquid can be significant because of the compression by the tremendous amount of liquid weight above.

The gravitational acceleration  $g$  varies from  $9.807 \text{ m/s}^2$  at sea level to  $9.764 \text{ m/s}^2$  at an elevation of 14,000 m where large passenger planes cruise. This is a change of just 0.4 percent in this extreme case. Therefore,  $g$  can be assumed to be constant with negligible error.

For fluids whose density changes significantly with elevation, a relation for the variation of pressure with elevation can be obtained by dividing Eq. 1–17 by  $\Delta x \Delta z$ , and taking the limit as  $\Delta z \rightarrow 0$ . It gives

$$\frac{dP}{dz} = -\rho g \quad (1-20)$$

The negative sign is due to our taking the positive  $z$  direction to be upward so that  $dP$  is negative when  $dz$  is positive since pressure decreases in an upward direction. When the variation of density with elevation is known,




the pressure difference between points 1 and 2 can be determined by integration to be

$$\Delta P = P_2 - P_1 = - \int_1^2 \rho g \, dz \quad (1-21)$$

For constant density and constant gravitational acceleration, this relation reduces to Eq. 1–18, as expected.


Pressure in a fluid at rest is independent of the shape or cross section of the container. It changes with the vertical distance, but remains constant in other directions. Therefore, the pressure is the same at all points on a horizontal plane in a given fluid. The Dutch mathematician Simon Stevin (1548–1620) published in 1586 the principle illustrated in Fig. 1–43. Note that the pressures at points *A*, *B*, *C*, *D*, *E*, *F*, and *G* are the same since they are at the same depth, and they are interconnected by the same static fluid. However, the pressures at points *H* and *I* are not the same since these two points cannot be interconnected by the same fluid (i.e., we cannot draw a curve from point *I* to point *H* while remaining in the same fluid at all times), although they are at the same depth. (Can you tell at which point the pressure is higher?) Also, the pressure force exerted by the fluid is always normal to the surface at the specified points.

A consequence of the pressure in a fluid remaining constant in the horizontal direction is that *the pressure applied to a confined fluid increases the pressure throughout by the same amount*. This is called **Pascal's law**, after Blaise Pascal (1623–1662). Pascal also knew that the force applied by a fluid is proportional to the surface area. He realized that two hydraulic cylinders of different areas could be connected, and the larger could be used



**FIGURE 1–42**

Pressure in a liquid at rest increases linearly with distance from the free surface.

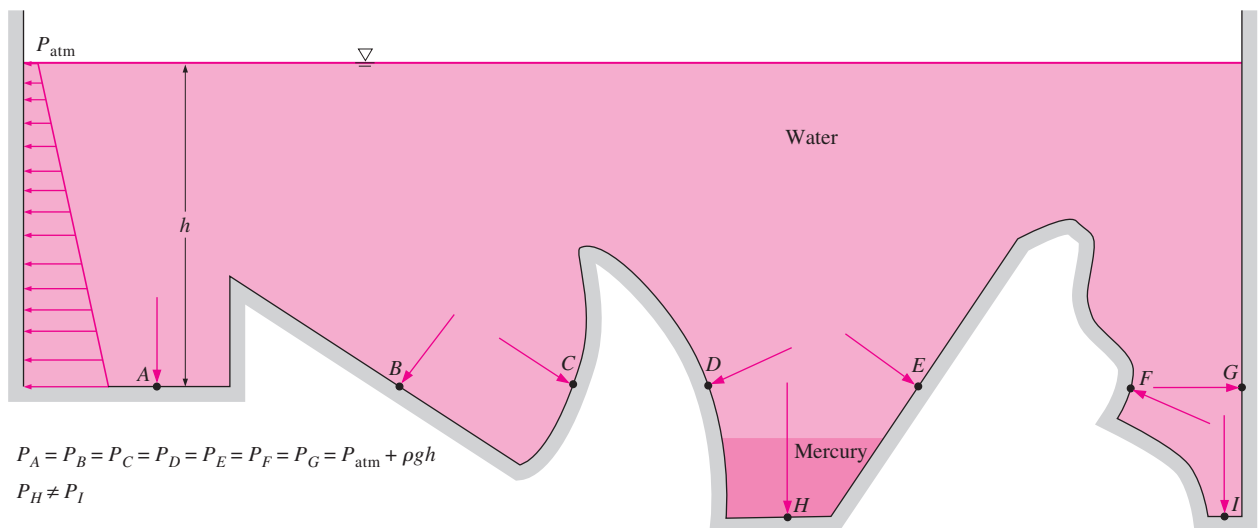

**FIGURE 1–43**

The pressure is the same at all points on a horizontal plane in a given fluid regardless of geometry, provided that the points are interconnected by the same fluid.

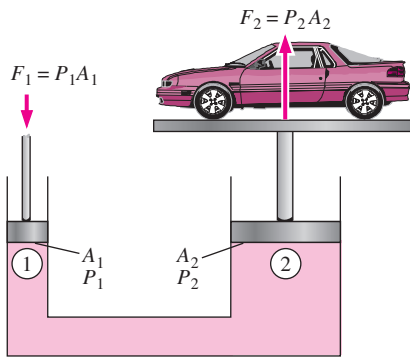


FIGURE 1-44

Lifting of a large weight by a small force by the application of Pascal's law.



INTERACTIVE  
TUTORIAL

SEE TUTORIAL CH. 1, SEC. 10 ON THE DVD.

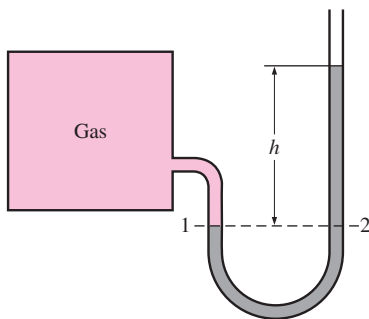


FIGURE 1-45

The basic manometer.

to exert a proportionally greater force than that applied to the smaller. “Pascal’s machine” has been the source of many inventions that are a part of our daily lives such as hydraulic brakes and lifts. This is what enables us to lift a car easily by one arm, as shown in Fig. 1–44. Noting that  $P_1 = P_2$  since both pistons are at the same level (the effect of small height differences is negligible, especially at high pressures), the ratio of output force to input force is determined to be

$$P_1 = P_2 \rightarrow \frac{F_1}{A_1} = \frac{F_2}{A_2} \rightarrow \frac{F_2}{F_1} = \frac{A_2}{A_1} \quad (1-22)$$

The area ratio  $A_2/A_1$  is called the *ideal mechanical advantage* of the hydraulic lift. Using a hydraulic car jack with a piston area ratio of  $A_2/A_1 = 10$ , for example, a person can lift a 1000-kg car by applying a force of just 100 kgf (= 981 N).

## 1-10 ■ THE MANOMETER

We notice from Eq. 1–18 that an elevation change of  $\Delta z$  in a fluid at rest corresponds to  $\Delta P/\rho g$ , which suggests that a fluid column can be used to measure pressure differences. A device based on this principle is called a **manometer**, and it is commonly used to measure small and moderate pressure differences. A manometer mainly consists of a glass or plastic U-tube containing one or more fluids such as mercury, water, alcohol, or oil. To keep the size of the manometer to a manageable level, heavy fluids such as mercury are used if large pressure differences are anticipated.

Consider the manometer shown in Fig. 1–45 that is used to measure the pressure in the tank. Since the gravitational effects of gases are negligible, the pressure anywhere in the tank and at position 1 has the same value. Furthermore, since pressure in a fluid does not vary in the horizontal direction within a fluid, the pressure at point 2 is the same as the pressure at point 1,  $P_2 = P_1$ .

The differential fluid column of height  $h$  is in static equilibrium, and it is open to the atmosphere. Then the pressure at point 2 is determined directly from Eq. 1–19 to be

$$P_2 = P_{\text{atm}} + \rho gh \quad (1-23)$$

where  $\rho$  is the density of the fluid in the tube. Note that the cross-sectional area of the tube has no effect on the differential height  $h$ , and thus the pressure exerted by the fluid. However, the diameter of the tube should be large enough (more than a few millimeters) to ensure that the surface tension effect and thus the capillary rise is negligible.

### EXAMPLE 1-6 Measuring Pressure with a Manometer

A manometer is used to measure the pressure in a tank. The fluid used has a specific gravity of 0.85, and the manometer column height is 55 cm, as shown in Fig. 1–46. If the local atmospheric pressure is 96 kPa, determine the absolute pressure within the tank.

**Solution** The reading of a manometer attached to a tank and the atmospheric pressure are given. The absolute pressure in the tank is to be determined.

**Assumptions** The fluid in the tank is a gas whose density is much lower than the density of manometer fluid.

**Properties** The specific gravity of the manometer fluid is given to be 0.85. We take the standard density of water to be  $1000 \text{ kg/m}^3$ .

**Analysis** The density of the fluid is obtained by multiplying its specific gravity by the density of water, which is taken to be  $1000 \text{ kg/m}^3$ :

$$\rho = SG (\rho_{\text{H}_2\text{O}}) = (0.85)(1000 \text{ kg/m}^3) = 850 \text{ kg/m}^3$$


Then from Eq. 1–23,

$$P = P_{\text{atm}} + \rho gh$$

$$= 96 \text{ kPa} + (850 \text{ kg/m}^3)(9.81 \text{ m/s}^2)(0.55 \text{ m}) \left( \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) \left( \frac{1 \text{ kPa}}{1000 \text{ N/m}^2} \right)$$


$$= \mathbf{100.6 \text{ kPa}}$$

**Discussion** Note that the gage pressure in the tank is 4.6 kPa.

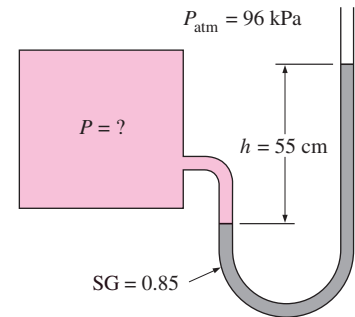

**FIGURE 1–46**

Schematic for Example 1–6.



**FIGURE 1–47**

In stacked-up fluid layers, the pressure change across a fluid layer of density  $\rho$  and height  $h$  is  $\rho gh$ .


Many engineering problems and some manometers involve multiple immiscible fluids of different densities stacked on top of each other. Such systems can be analyzed easily by remembering that (1) the pressure change across a fluid column of height  $h$  is  $\Delta P = \rho gh$ , (2) pressure increases downward in a given fluid and decreases upward (i.e.,  $P_{\text{bottom}} > P_{\text{top}}$ ), and (3) two points at the same elevation in a continuous fluid at rest are at the same pressure.

The last principle, which is a result of *Pascal's law*, allows us to “jump” from one fluid column to the next in manometers without worrying about pressure change as long as we don’t jump over a different fluid, and the fluid is at rest. Then the pressure at any point can be determined by starting with a point of known pressure and adding or subtracting  $\rho gh$  terms as we advance toward the point of interest. For example, the pressure at the bottom of the tank in Fig. 1–47 can be determined by starting at the free surface where the pressure is  $P_{\text{atm}}$ , moving downward until we reach point 1 at the bottom, and setting the result equal to  $P_1$ . It gives

$$P_{\text{atm}} + \rho_1 gh_1 + \rho_2 gh_2 + \rho_3 gh_3 = P_1$$

In the special case of all fluids having the same density, this relation reduces to Eq. 1–23, as expected.

Manometers are particularly well-suited to measure pressure drops across a horizontal flow section between two specified points due to the presence of a device such as a valve or heat exchanger or any resistance to flow. This is done by connecting the two legs of the manometer to these two points, as shown in Fig. 1–48. The working fluid can be either a gas or a liquid whose density is  $\rho_1$ . The density of the manometer fluid is  $\rho_2$ , and the differential fluid height is  $h$ .

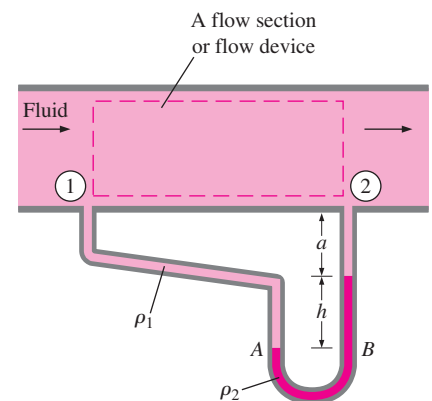

**FIGURE 1–48**

Measuring the pressure drop across a flow section or a flow device by a differential manometer.


A relation for the pressure difference  $P_1 - P_2$  can be obtained by starting at point 1 with  $P_1$ , moving along the tube by adding or subtracting the  $\rho gh$  terms until we reach point 2, and setting the result equal to  $P_2$ :

$$P_1 + \rho_1 g(a + h) - \rho_2 gh - \rho_1 ga = P_2 \quad (1-24)$$

Note that we jumped from point  $A$  horizontally to point  $B$  and ignored the part underneath since the pressure at both points is the same. Simplifying,

$$P_1 - P_2 = (\rho_2 - \rho_1)gh \quad (1-25)$$

Note that the distance  $a$  has no effect on the result, but must be included in the analysis. Also, when the fluid flowing in the pipe is a gas, then  $\rho_1 \ll \rho_2$  and the relation in Eq. 1-25 simplifies to  $P_1 - P_2 \cong \rho_2 gh$ .

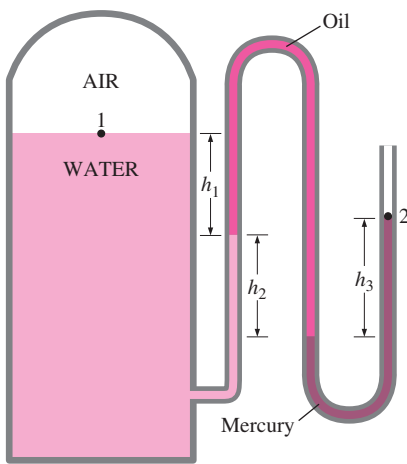

**FIGURE 1-49**  
Schematic for Example 1-7. (Drawing not to scale.)

### EXAMPLE 1-7 Measuring Pressure with a Multifluid Manometer

The water in a tank is pressurized by air, and the pressure is measured by a multifluid manometer as shown in Fig. 1-49. The tank is located on a mountain at an altitude of 1400 m where the atmospheric pressure is 85.6 kPa. Determine the air pressure in the tank if  $h_1 = 0.1$  m,  $h_2 = 0.2$  m, and  $h_3 = 0.35$  m. Take the densities of water, oil, and mercury to be  $1000$   $\text{kg/m}^3$ ,  $850$   $\text{kg/m}^3$ , and  $13,600$   $\text{kg/m}^3$ , respectively.

**Solution** The pressure in a pressurized water tank is measured by a multifluid manometer. The air pressure in the tank is to be determined.

**Assumption** The air pressure in the tank is uniform (i.e., its variation with elevation is negligible due to its low density), and thus we can determine the pressure at the air–water interface.

**Properties** The densities of water, oil, and mercury are given to be  $1000$   $\text{kg/m}^3$ ,  $850$   $\text{kg/m}^3$ , and  $13,600$   $\text{kg/m}^3$ , respectively.

**Analysis** Starting with the pressure at point 1 at the air–water interface, moving along the tube by adding or subtracting the  $\rho gh$  terms until we reach point 2, and setting the result equal to  $P_{\text{atm}}$  since the tube is open to the atmosphere gives

$$P_1 + \rho_{\text{water}}gh_1 + \rho_{\text{oil}}gh_2 - \rho_{\text{mercury}}gh_3 = P_{\text{atm}}$$

Solving for  $P_1$  and substituting,

$$\begin{aligned} P_1 &= P_{\text{atm}} - \rho_{\text{water}}gh_1 - \rho_{\text{oil}}gh_2 + \rho_{\text{mercury}}gh_3 \\ &= P_{\text{atm}} + g(\rho_{\text{mercury}}h_3 - \rho_{\text{water}}h_1 - \rho_{\text{oil}}h_2) \\ &= 85.6 \text{ kPa} + (9.81 \text{ m/s}^2)[(13,600 \text{ kg/m}^3)(0.35\text{m}) - 1000 \text{ kg/m}^3(0.1 \text{ m}) \\ &\quad - (850 \text{ kg/m}^3)(0.2 \text{ m})] \left( \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) \left( \frac{1 \text{ kPa}}{1000 \text{ N/m}^2} \right) \\ &= \mathbf{130 \text{ kPa}} \end{aligned}$$

**Discussion** Note that jumping horizontally from one tube to the next and realizing that pressure remains the same in the same fluid simplifies the analysis considerably. Also note that mercury is a toxic fluid, and mercury manometers and thermometers are being replaced by ones with safer fluids because of the risk of exposure to mercury vapor during an accident.

## Other Pressure Measurement Devices

Another type of commonly used mechanical pressure measurement device is the **Bourdon tube**, named after the French engineer and inventor Eugene Bourdon (1808–1884), which consists of a hollow metal tube bent like a hook whose end is closed and connected to a dial indicator needle (Fig. 1–50). When the tube is open to the atmosphere, the tube is undeflected, and the needle on the dial at this state is calibrated to read zero (gauge pressure). When the fluid inside the tube is pressurized, the tube stretches and moves the needle in proportion to the pressure applied.

Electronics have made their way into every aspect of life, including pressure measurement devices. Modern pressure sensors, called **pressure transducers**, use various techniques to convert the pressure effect to an electrical effect such as a change in voltage, resistance, or capacitance. Pressure transducers are smaller and faster, and they can be more sensitive, reliable, and precise than their mechanical counterparts. They can measure pressures from less than a millionth of 1 atm to several thousands of atm.

A wide variety of pressure transducers is available to measure gage, absolute, and differential pressures in a wide range of applications. *Gage pressure transducers* use the atmospheric pressure as a reference by venting the back side of the pressure-sensing diaphragm to the atmosphere, and they give a zero signal output at atmospheric pressure regardless of altitude. The *absolute pressure transducers* are calibrated to have a zero signal output at full vacuum. *Differential pressure transducers* measure the pressure difference between two locations directly instead of using two pressure transducers and taking their difference.


**Strain-gage pressure transducers** work by having a diaphragm deflect between two chambers open to the pressure inputs. As the diaphragm stretches in response to a change in pressure difference across it, the strain gage stretches and a Wheatstone bridge circuit amplifies the output. A capacitance transducer works similarly, but capacitance change is measured instead of resistance change as the diaphragm stretches.

**Piezoelectric transducers**, also called solid-state pressure transducers, work on the principle that an electric potential is generated in a crystalline substance when it is subjected to mechanical pressure. This phenomenon, first discovered by brothers Pierre and Jacques Curie in 1880, is called the piezoelectric (or press-electric) effect. Piezoelectric pressure transducers have a much faster frequency response compared to the diaphragm units and are very suitable for high-pressure applications, but they are generally not as sensitive as the diaphragm-type transducers.

### 1–11 ■ THE BAROMETER AND ATMOSPHERIC PRESSURE

Atmospheric pressure is measured by a device called a **barometer**; thus, the atmospheric pressure is often referred to as the *barometric pressure*.

The Italian Evangelista Torricelli (1608–1647) was the first to conclusively prove that the atmospheric pressure can be measured by inverting a mercury-filled tube into a mercury container that is open to the atmosphere,

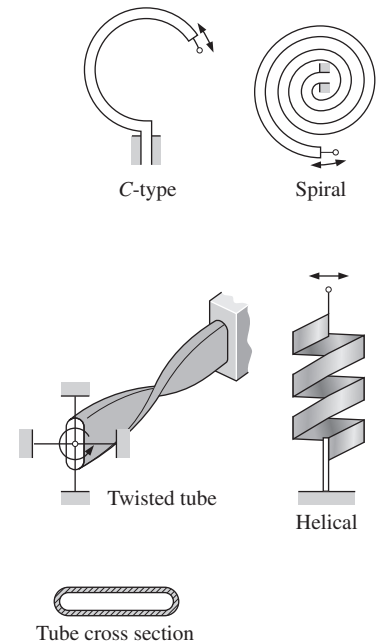


**FIGURE 1–50**

Various types of Bourdon tubes used to measure pressure.




**INTERACTIVE  
TUTORIAL**

SEE TUTORIAL CH. 1, SEC. 11 ON THE DVD.

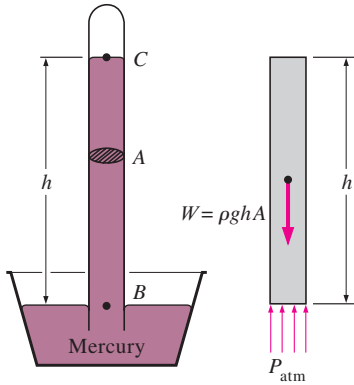

**FIGURE 1-51**  
The basic barometer.

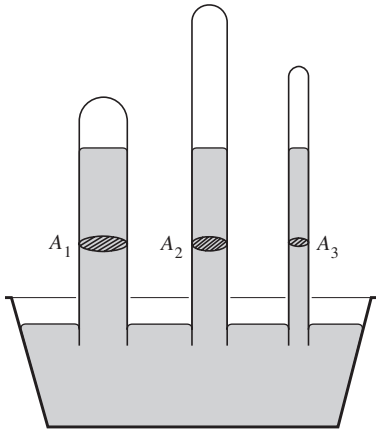

**FIGURE 1-52**  
The length or the cross-sectional area of the tube has no effect on the height of the fluid column of a barometer, provided that the tube diameter is large enough to avoid surface tension (capillary) effects.

as shown in Fig. 1–51. The pressure at point  $B$  is equal to the atmospheric pressure, and the pressure at  $C$  can be taken to be zero since there is only mercury vapor above point  $C$  and the pressure is very low relative to  $P_{\text{atm}}$  and can be neglected to an excellent approximation. Writing a force balance in the vertical direction gives

$$P_{\text{atm}} = \rho gh \quad (1-26)$$

where  $\rho$  is the density of mercury,  $g$  is the local gravitational acceleration, and  $h$  is the height of the mercury column above the free surface. Note that the length and the cross-sectional area of the tube have no effect on the height of the fluid column of a barometer (Fig. 1–52).

A frequently used pressure unit is the *standard atmosphere*, which is defined as the pressure produced by a column of mercury 760 mm in height at  $0^\circ\text{C}$  ( $\rho_{\text{Hg}} = 13,595 \text{ kg/m}^3$ ) under standard gravitational acceleration ( $g = 9.807 \text{ m/s}^2$ ). If water instead of mercury were used to measure the standard atmospheric pressure, a water column of about 10.3 m would be needed. Pressure is sometimes expressed (especially by weather forecasters) in terms of the height of the mercury column. The standard atmospheric pressure, for example, is 760 mmHg (29.92 inHg) at  $0^\circ\text{C}$ . The unit mmHg is also called the **torr** in honor of Torricelli. Therefore,  $1 \text{ atm} = 760 \text{ torr}$  and  $1 \text{ torr} = 133.3 \text{ Pa}$ .

The standard atmospheric pressure  $P_{\text{atm}}$  changes from 101.325 kPa at sea level to 89.88, 79.50, 54.05, 26.5, and 5.53 kPa at altitudes of 1000, 2000, 5000, 10,000, and 20,000 meters, respectively. The standard atmospheric pressure in Denver (elevation = 1610 m), for example, is 83.4 kPa.

Remember that the atmospheric pressure at a location is simply the weight of the air above that location per unit surface area. Therefore, it changes not only with elevation but also with weather conditions.

The decline of atmospheric pressure with elevation has far-reaching ramifications in daily life. For example, cooking takes longer at high altitudes since water boils at a lower temperature at lower atmospheric pressures. Nose bleeding is a common experience at high altitudes since the difference between the blood pressure and the atmospheric pressure is larger in this case, and the delicate walls of veins in the nose are often unable to withstand this extra stress.

For a given temperature, the density of air is lower at high altitudes, and thus a given volume contains less air and less oxygen. So it is no surprise that we tire more easily and experience breathing problems at high altitudes. To compensate for this effect, people living at higher altitudes develop more efficient lungs. Similarly, a 2.0-L car engine will act like a 1.7-L car engine at 1500 m altitude (unless it is turbocharged) because of the 15 percent drop in pressure and thus 15 percent drop in the density of air (Fig. 1–53). A fan or compressor will displace 15 percent less air at that altitude for the same volume displacement rate. Therefore, larger cooling fans may need to be selected for operation at high altitudes to ensure the specified mass flow rate. The lower pressure and thus lower density also affects lift and drag: airplanes need a longer runway at high altitudes to develop the required lift, and they climb to very high altitudes for cruising for reduced drag and thus better fuel efficiency.

### EXAMPLE 1–8 Measuring Atmospheric Pressure with a Barometer

Determine the atmospheric pressure at a location where the barometric reading is 740 mm Hg and the gravitational acceleration is  $g = 9.81 \text{ m/s}^2$ . Assume the temperature of mercury to be  $10^\circ\text{C}$ , at which its density is  $13,570 \text{ kg/m}^3$ .

**Solution** The barometric reading at a location in height of mercury column is given. The atmospheric pressure is to be determined.

**Assumptions** The temperature of mercury is  $10^\circ\text{C}$ .

**Properties** The density of mercury is given to be  $13,570 \text{ kg/m}^3$ .

**Analysis** From Eq. 1–26, the atmospheric pressure is determined to be

$$\begin{aligned} P_{\text{atm}} &= \rho gh \\ &= (13,570 \text{ kg/m}^3)(9.81 \text{ m/s}^2)(0.74 \text{ m}) \left( \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) \left( \frac{1 \text{ kPa}}{1000 \text{ N/m}^2} \right) \\ &= \mathbf{98.5 \text{ kPa}} \end{aligned}$$

**Discussion** Note that density changes with temperature, and thus this effect should be considered in calculations.

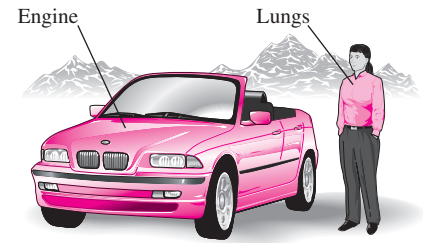


FIGURE 1–53

At high altitudes, a car engine generates less power and a person gets less oxygen because of the lower density of air.

### EXAMPLE 1–9 Effect of Piston Weight on Pressure in a Cylinder

The piston of a vertical piston–cylinder device containing a gas has a mass of 60 kg and a cross-sectional area of  $0.04 \text{ m}^2$ , as shown in Fig. 1–54. The local atmospheric pressure is 0.97 bar, and the gravitational acceleration is  $9.81 \text{ m/s}^2$ . (a) Determine the pressure inside the cylinder. (b) If some heat is transferred to the gas and its volume is doubled, do you expect the pressure inside the cylinder to change?

**Solution** A gas is contained in a vertical cylinder with a heavy piston. The pressure inside the cylinder and the effect of volume change on pressure are to be determined.

**Assumptions** Friction between the piston and the cylinder is negligible.

**Analysis** (a) The gas pressure in the piston–cylinder device depends on the atmospheric pressure and the weight of the piston. Drawing the free-body diagram of the piston as shown in Fig. 1–54 and balancing the vertical forces yield

$$PA = P_{\text{atm}}A + W$$

Solving for  $P$  and substituting,

$$\begin{aligned} P &= P_{\text{atm}} + \frac{mg}{A} \\ &= 0.97 \text{ bar} + \frac{(60 \text{ kg})(9.81 \text{ m/s}^2)}{(0.04 \text{ m}^2)} \left( \frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) \left( \frac{1 \text{ bar}}{10^5 \text{ N/m}^2} \right) \\ &= \mathbf{1.12 \text{ bar}} \end{aligned}$$

(b) The volume change will have no effect on the free-body diagram drawn in part (a), and therefore the pressure inside the cylinder will remain the same.

**Discussion** If the gas behaves as an ideal gas, the absolute temperature doubles when the volume is doubled at constant pressure.

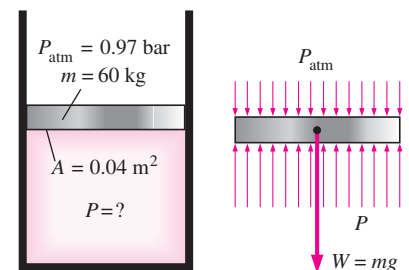


FIGURE 1–54

Schematic for Example 1–9, and the free-body diagram of the piston.

### EXAMPLE 1–10 Hydrostatic Pressure in a Solar Pond with Variable Density

Solar ponds are small artificial lakes of a few meters deep that are used to store solar energy. The rise of heated (and thus less dense) water to the surface is prevented by adding salt at the pond bottom. In a typical salt gradient solar pond, the density of water increases in the gradient zone, as shown in Fig. 1–55, and the density can be expressed as

$$\rho = \rho_0 \sqrt{1 + \tan^2 \left( \frac{\pi z}{4 H} \right)}$$

where  $\rho_0$  is the density on the water surface,  $z$  is the vertical distance measured downward from the top of the gradient zone, and  $H$  is the thickness of the gradient zone. For  $H = 4$  m,  $\rho_0 = 1040$  kg/m<sup>3</sup>, and a thickness of 0.8 m for the surface zone, calculate the gage pressure at the bottom of the gradient zone.

**Solution** The variation of density of saline water in the gradient zone of a solar pond with depth is given. The gage pressure at the bottom of the gradient zone is to be determined.

**Assumptions** The density in the surface zone of the pond is constant.

**Properties** The density of brine on the surface is given to be 1040 kg/m<sup>3</sup>.

**Analysis** We label the top and the bottom of the gradient zone as 1 and 2, respectively. Noting that the density of the surface zone is constant, the gage pressure at the bottom of the surface zone (which is the top of the gradient zone) is


$$P_1 = \rho g h_1 = (1040 \text{ kg/m}^3)(9.81 \text{ m/s}^2)(0.8 \text{ m}) \left( \frac{1 \text{ kN}}{1000 \text{ kg} \cdot \text{m/s}^2} \right) = 8.16 \text{ kPa}$$

since 1 kN/m<sup>2</sup> = 1 kPa. The differential change in hydrostatic pressure across a vertical distance of  $dz$  is given by

$$dP = \rho g dz$$

Integrating from the top of the gradient zone (point 1 where  $z = 0$ ) to any location  $z$  in the gradient zone (no subscript) gives

$$P - P_1 = \int_0^z \rho g dz \quad \rightarrow \quad P = P_1 + \int_0^z \rho_0 \sqrt{1 + \tan^2 \left( \frac{\pi z}{4 H} \right)} g dz$$

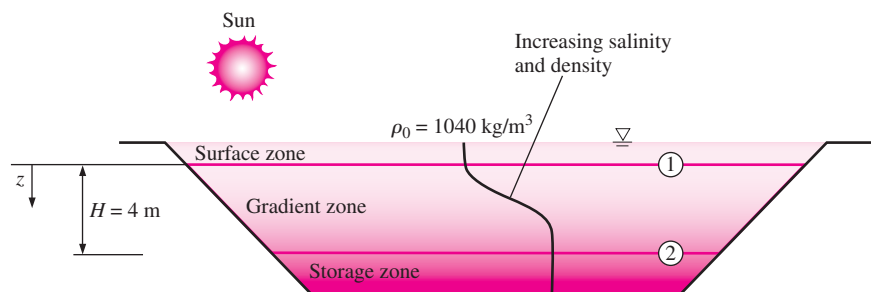

**FIGURE 1–55**  
Schematic for Example 1–10.




Performing the integration gives the variation of gage pressure in the gradient zone to be

$$P = P_1 + \rho_0 g \frac{4H}{\pi} \sinh^{-1} \left( \tan \frac{\pi z}{4H} \right)$$

Then the pressure at the bottom of the gradient zone ( $z = H = 4 \text{ m}$ ) becomes

$$\begin{aligned} P_2 &= 8.16 \text{ kPa} + (1040 \text{ kg/m}^3)(9.81 \text{ m/s}^2) \frac{4(4 \text{ m})}{\pi} \\ &\quad \times \sinh^{-1} \left( \tan \frac{\pi 4}{4 4} \right) \left( \frac{1 \text{ kN}}{1000 \text{ kg} \cdot \text{m/s}^2} \right) \\ &= \mathbf{54.0 \text{ kPa (gage)}} \end{aligned}$$

**Discussion** The variation of gage pressure in the gradient zone with depth is plotted in Fig. 1–56. The dashed line indicates the hydrostatic pressure for the case of constant density at  $1040 \text{ kg/m}^3$  and is given for reference. Note that the variation of pressure with depth is not linear when density varies with depth.

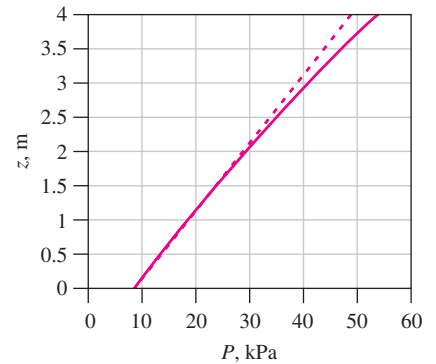

**FIGURE 1–56**

The variation of gage pressure with depth in the gradient zone of the solar pond.

## 1–12 ■ PROBLEM-SOLVING TECHNIQUE

The first step in learning any science is to grasp the fundamentals and to gain a sound knowledge of it. The next step is to master the fundamentals by testing this knowledge. This is done by solving significant real-world problems. Solving such problems, especially complicated ones, require a systematic approach. By using a step-by-step approach, an engineer can reduce the solution of a complicated problem into the solution of a series of simple problems (Fig. 1–57). When you are solving a problem, we recommend that you use the following steps zealously as applicable. This will help you avoid some of the common pitfalls associated with problem solving.

### Step 1: Problem Statement

In your own words, briefly state the problem, the key information given, and the quantities to be found. This is to make sure that you understand the problem and the objectives before you attempt to solve the problem.


### Step 2: Schematic

Draw a realistic sketch of the physical system involved, and list the relevant information on the figure. The sketch does not have to be something elaborate, but it should resemble the actual system and show the key features. Indicate any energy and mass interactions with the surroundings. Listing the given information on the sketch helps one to see the entire problem at once. Also, check for properties that remain constant during a process (such as temperature during an isothermal process), and indicate them on the sketch.



**INTERACTIVE  
TUTORIAL**

SEE TUTORIAL CH. 1, SEC. 12 ON THE DVD.

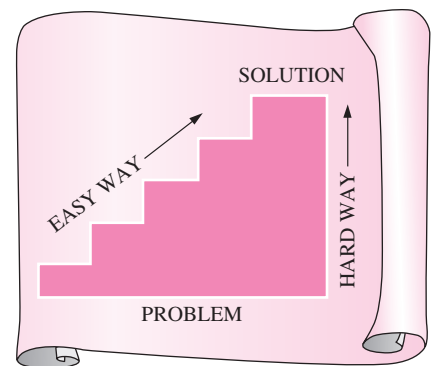

**FIGURE 1–57**

A step-by-step approach can greatly simplify problem solving.

<input type="radio"/>	<b>Given:</b> Air temperature in Denver
<input type="radio"/>	<b>To be found:</b> Density of air
	<b>Missing information:</b> Atmospheric pressure
<input type="radio"/>	<b>Assumption #1:</b> Take $P = 1$ atm (Inappropriate. Ignores effect of altitude. Will cause more than 15% error.)
<input type="radio"/>	<b>Assumption #2:</b> Take $P = 0.83$ atm (Appropriate. Ignores only minor effects such as weather.)
<input type="radio"/>	
<input type="radio"/>	

FIGURE 1-58

The assumptions made while solving an engineering problem must be reasonable and justifiable.

### Step 3: Assumptions and Approximations

State any appropriate assumptions and approximations made to simplify the problem to make it possible to obtain a solution. Justify the questionable assumptions. Assume reasonable values for missing quantities that are necessary. For example, in the absence of specific data for atmospheric pressure, it can be taken to be 1 atm. However, it should be noted in the analysis that the atmospheric pressure decreases with increasing elevation. For example, it drops to 0.83 atm in Denver (elevation 1610 m) (Fig. 1-58).

### Step 4: Physical Laws

Apply all the relevant basic physical laws and principles (such as the conservation of mass), and reduce them to their simplest form by utilizing the assumptions made. However, the region to which a physical law is applied must be clearly identified first. For example, the increase in speed of water flowing through a nozzle is analyzed by applying conservation of mass between the inlet and outlet of the nozzle.

### Step 5: Properties

Determine the unknown properties at known states necessary to solve the problem from property relations or tables. List the properties separately, and indicate their source, if applicable.

### Step 6: Calculations

Substitute the known quantities into the simplified relations and perform the calculations to determine the unknowns. Pay particular attention to the units and unit cancellations, and remember that a dimensional quantity without a unit is meaningless. Also, don't give a false implication of high precision by copying all the digits from the screen of the calculator—round the results to an appropriate number of significant digits (see p. 38).

### Step 7: Reasoning, Verification, and Discussion

Check to make sure that the results obtained are reasonable and intuitive, and verify the validity of the questionable assumptions. Repeat the calculations that resulted in unreasonable values. For example, insulating a water heater that uses \$80 worth of natural gas a year cannot result in savings of \$200 a year (Fig. 1-59).

Also, point out the significance of the results, and discuss their implications. State the conclusions that can be drawn from the results, and any recommendations that can be made from them. Emphasize the limitations under which the results are applicable, and caution against any possible misunderstandings and using the results in situations where the underlying assumptions do not apply. For example, if you determined that wrapping a water heater with a \$20 insulation jacket will reduce the energy cost by \$30 a year, indicate that the insulation will pay for itself from the energy it saves in less than a year. However, also indicate that the analysis does not consider labor costs, and that this will be the case if you install the insulation yourself.

<b>Energy use:</b>	<b>\$80/yr</b>
<b>Energy saved by insulation:</b>	<b>\$200/yr</b>
<b>IMPOSSIBLE!</b>	

FIGURE 1-59

The results obtained from an engineering analysis must be checked for reasonableness.

Keep in mind that the solutions you present to your instructors, and any engineering analysis presented to others, is a form of communication. Therefore neatness, organization, completeness, and visual appearance are of utmost importance for maximum effectiveness. Besides, neatness also serves as a great checking tool since it is very easy to spot errors and inconsistencies in neat work. Carelessness and skipping steps to save time often end up costing more time and unnecessary anxiety.

The approach described here is used in the solved example problems without explicitly stating each step, as well as in the Solutions Manual of this text. For some problems, some of the steps may not be applicable or necessary. For example, often it is not practical to list the properties separately. However, we cannot overemphasize the importance of a logical and orderly approach to problem solving. Most difficulties encountered while solving a problem are not due to a lack of knowledge; rather, they are due to a lack of organization. You are strongly encouraged to follow these steps in problem solving until you develop your own approach that works best for you.

## Engineering Software Packages

You may be wondering why we are about to undertake an in-depth study of the fundamentals of another engineering science. After all, almost all such problems we are likely to encounter in practice can be solved using one of several sophisticated software packages readily available in the market today. These software packages not only give the desired numerical results, but also supply the outputs in colorful graphical form for impressive presentations. It is unthinkable to practice engineering today without using some of these packages. This tremendous computing power available to us at the touch of a button is both a blessing and a curse. It certainly enables engineers to solve problems easily and quickly, but it also opens the door for abuses and misinformation. In the hands of poorly educated people, these software packages are as dangerous as sophisticated powerful weapons in the hands of poorly trained soldiers.

Thinking that a person who can use the engineering software packages without proper training on fundamentals can practice engineering is like thinking that a person who can use a wrench can work as a car mechanic. If it were true that the engineering students do not need all these fundamental courses they are taking because practically everything can be done by computers quickly and easily, then it would also be true that the employers would no longer need high-salaried engineers since any person who knows how to use a word-processing program can also learn how to use those software packages. However, the statistics show that the need for engineers is on the rise, not on the decline, despite the availability of these powerful packages.

We should always remember that all the computing power and the engineering software packages available today are just *tools*, and tools have meaning only in the hands of masters. Having the best word-processing program does not make a person a good writer, but it certainly makes the job of a good writer much easier and makes the writer more productive (Fig. 1–60). Hand calculators did not eliminate the need to teach our children how to add or subtract, and the sophisticated medical software packages did not take the



**FIGURE 1–60**

An excellent word-processing program does not make a person a good writer; it simply makes a good writer a more efficient writer.

© Vol. 80/PhotoDisc

place of medical school training. Neither will engineering software packages replace the traditional engineering education. They will simply cause a shift in emphasis in the courses from mathematics to physics. That is, more time will be spent in the classroom discussing the physical aspects of the problems in greater detail, and less time on the mechanics of solution procedures.

All these marvelous and powerful tools available today put an extra burden on today's engineers. They must still have a thorough understanding of the fundamentals, develop a "feel" of the physical phenomena, be able to put the data into proper perspective, and make sound engineering judgments, just like their predecessors. However, they must do it much better, and much faster, using more realistic models because of the powerful tools available today. The engineers in the past had to rely on hand calculations, slide rules, and later hand calculators and computers. Today they rely on software packages. The easy access to such power and the possibility of a simple misunderstanding or misinterpretation causing great damage make it more important today than ever to have solid training in the fundamentals of engineering. In this text we make an extra effort to put the emphasis on developing an intuitive and physical understanding of natural phenomena instead of on the mathematical details of solution procedures.

## Engineering Equation Solver (EES)

EES is a program that solves systems of linear or nonlinear algebraic or differential equations numerically. It has a large library of built-in thermodynamic property functions as well as mathematical functions, and allows the user to supply additional property data. Unlike some software packages, EES does not solve engineering problems; it only solves the equations supplied by the user. Therefore, the user must understand the problem and formulate it by applying any relevant physical laws and relations. EES saves the user considerable time and effort by simply solving the resulting mathematical equations. This makes it possible to attempt significant engineering problems not suitable for hand calculations, and to conduct parametric studies quickly and conveniently. EES is a very powerful yet intuitive program that is very easy to use, as shown in Examples 1–11 and 1–12. The use and capabilities of EES are explained in Appendix 3 on the enclosed DVD.

### EXAMPLE 1–11 Solving a System of Equations with EES

The difference of two numbers is 4, and the sum of the squares of these two numbers is equal to the sum of the numbers plus 20. Determine these two numbers.

**Solution** Relations are given for the difference and the sum of the squares of two numbers. They are to be determined.

**Analysis** We start the EES program by double-clicking on its icon, open a new file, and type the following on the blank screen that appears:

$$x - y = 4$$

$$x^2 + y^2 = x + y + 20$$

which is an exact mathematical expression of the problem statement with  $x$  and  $y$  denoting the unknown numbers. The solution to this system of two nonlinear equations with two unknowns is obtained by a single click on the “calculator” icon on the taskbar. It gives

$$x=5 \quad \text{and} \quad y=1$$

**Discussion** Note that all we did is formulate the problem as we would on paper; EES took care of all the mathematical details of solution. Also note that equations can be linear or nonlinear, and they can be entered in any order with unknowns on either side. Friendly equation solvers such as EES allow the user to concentrate on the physics of the problem without worrying about the mathematical complexities associated with the solution of the resulting system of equations.

### EXAMPLE 1–12 Analyzing a Multifluid Manometer with EES

Reconsider the multifluid manometer discussed in Example 1–7 and replotted in Fig. 1–61. Determine the air pressure in the tank using EES. Also determine what the differential fluid height  $h_3$  would be for the same air pressure if the mercury in the last column were replaced by seawater with a density of  $1030 \text{ kg/m}^3$ .

**Solution** The pressure in a water tank is measured by a multifluid manometer. The air pressure in the tank and the differential fluid height  $h_3$  if mercury is replaced by seawater are to be determined using EES.

**Analysis** We start the EES program by double-clicking on its icon, open a new file, and type the following on the blank screen that appears (we express the atmospheric pressure in Pa for unit consistency):

```
g=9.81
Patm=85600
h1=0.1; h2=0.2; h3=0.35
rw=1000; roil=850; rm=13600
P1+rw*g*h1+roil*g*h2-rm*g*h3=Patm
```

Here  $P_1$  is the only unknown, and it is determined by EES to be

$$P_1 = 129647 \text{ Pa} \cong 130 \text{ kPa}$$

which is identical to the result obtained before. The height of the fluid column  $h_3$  when mercury is replaced by seawater is determined easily by replacing “ $h3=0.35$ ” by “ $P1=129647$ ” and “ $rm=13600$ ” by “ $rm=1030$ ,” and clicking on the calculator symbol. It gives

$$h_3 = 4.62 \text{ m}$$

**Discussion** Note that we used the screen like a paper pad and wrote down the relevant information together with the applicable relations in an organized manner. EES did the rest. Equations can be written on separate lines or on the same line by separating them by semicolons, and blank or comment lines can be inserted for readability. EES makes it very easy to ask “what if” questions, and to perform parametric studies, as explained in Appendix 3 on the DVD.

EES also has the capability to check the equations for unit consistency if units are supplied together with numerical values. Units can be specified


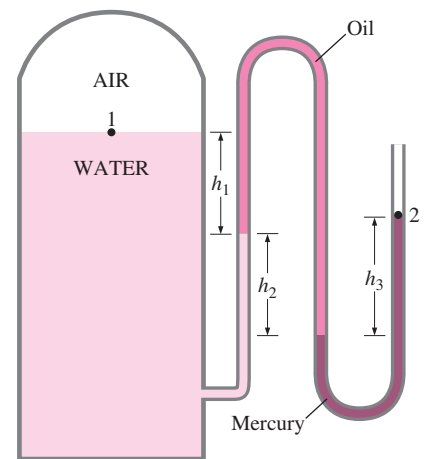


FIGURE 1–61  
Schematic for Example 1–12.

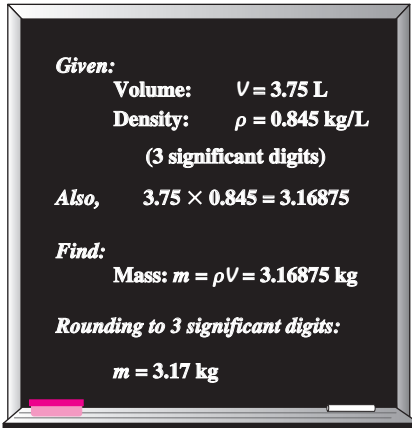

**FIGURE 1–62**

A result with more significant digits than that of given data falsely implies more accuracy.

within brackets [ ] after the specified value. When this feature is utilized, the previous equations would take the following form:

$$\begin{aligned}
 g &= 9.81 \text{ [m/s}^2\text{]} \\
 P_{\text{atm}} &= 85600 \text{ [Pa]} \\
 h_1 &= 0.1 \text{ [m]; } h_2 = 0.2 \text{ [m]; } h_3 = 0.35 \text{ [m]} \\
 \rho_w &= 1000 \text{ [kg/m}^3\text{]}; \quad \rho_{\text{oil}} = 850 \text{ [kg/m}^3\text{]}; \quad \rho_m = 13600 \text{ [kg/m}^3\text{]} \\
 P_1 + \rho_w g h_1 + \rho_{\text{oil}} g h_2 - \rho_m g h_3 &= P_{\text{atm}}
 \end{aligned}$$

## A Remark on Significant Digits

In engineering calculations, the information given is not known to more than a certain number of significant digits, usually three digits. Consequently, the results obtained cannot possibly be accurate to more significant digits. Reporting results in more significant digits implies greater accuracy than exists, and it should be avoided.

For example, consider a 3.75-L container filled with gasoline whose density is 0.845 kg/L, and try to determine its mass. Probably the first thought that comes to your mind is to multiply the volume and density to obtain 3.16875 kg for the mass, which falsely implies that the mass determined is accurate to six significant digits. In reality, however, the mass cannot be more accurate than three significant digits since both the volume and the density are accurate to three significant digits only. Therefore, the result should be rounded to three significant digits, and the mass should be reported to be 3.17 kg instead of what appears in the screen of the calculator. The result 3.16875 kg would be correct only if the volume and density were given to be 3.75000 L and 0.845000 kg/L, respectively. The value 3.75 L implies that we are fairly confident that the volume is accurate within  $\pm 0.01 \text{ L}$ , and it cannot be 3.74 or 3.76 L. However, the volume can be 3.746, 3.750, 3.753, etc., since they all round to 3.75 L (Fig. 1–62). It is more appropriate to retain all the digits during intermediate calculations, and to do the rounding in the final step since this is what a computer will normally do.

When solving problems, we will assume the given information to be accurate to at least three significant digits. Therefore, if the length of a pipe is given to be 40 m, we will assume it to be 40.0 m in order to justify using three significant digits in the final results. You should also keep in mind that all experimentally determined values are subject to measurement errors, and such errors will reflect in the results obtained. For example, if the density of a substance has an uncertainty of 2 percent, then the mass determined using this density value will also have an uncertainty of 2 percent.

You should also be aware that we sometimes knowingly introduce small errors in order to avoid the trouble of searching for more accurate data. For example, when dealing with liquid water, we just use the value of 1000 kg/m<sup>3</sup> for density, which is the density value of pure water at 0°C. Using this value at 75°C will result in an error of 2.5 percent since the density at this temperature is 975 kg/m<sup>3</sup>. The minerals and impurities in the water will introduce additional error. This being the case, you should have no reservation in rounding the final results to a reasonable number of significant digits. Besides, having a few percent uncertainty in the results of engineering analysis is usually the norm, not the exception.

## SUMMARY

In this chapter, the basic concepts of thermodynamics are introduced and discussed. *Thermodynamics* is the science that primarily deals with energy. The *first law of thermodynamics* is simply an expression of the conservation of energy principle, and it asserts that *energy* is a thermodynamic property. The *second law of thermodynamics* asserts that energy has *quality* as well as *quantity*, and actual processes occur in the direction of decreasing quality of energy.

A system of fixed mass is called a *closed system*, or *control mass*, and a system that involves mass transfer across its boundaries is called an *open system*, or *control volume*. The mass-dependent properties of a system are called *extensive properties* and the others *intensive properties*. *Density* is mass per unit volume, and *specific volume* is volume per unit mass.

A system is said to be in *thermodynamic equilibrium* if it maintains thermal, mechanical, phase, and chemical equilibrium. Any change from one state to another is called a *process*. A process with identical end states is called a *cycle*. During a *quasi-static* or *quasi-equilibrium process*, the system remains practically in equilibrium at all times. The state of a simple, compressible system is completely specified by two independent, intensive properties.

The *zeroth law of thermodynamics* states that two bodies are in thermal equilibrium if both have the same temperature reading even if they are not in contact.

The temperature scales used in the SI and the English system today are the *Celsius scale* and the *Fahrenheit scale*, respectively. They are related to absolute temperature scales by

$$T(\text{K}) = T(^{\circ}\text{C}) + 273.15$$

$$T(\text{R}) = T(^{\circ}\text{F}) + 459.67$$

The magnitudes of each division of 1 K and 1 $^{\circ}$ C are identical, and so are the magnitudes of each division of 1 R and 1 $^{\circ}$ F. Therefore,

$$\Delta T(\text{K}) = \Delta T(^{\circ}\text{C}) \quad \text{and} \quad \Delta T(\text{R}) = \Delta T(^{\circ}\text{F})$$

The normal force exerted by a fluid per unit area is called *pressure*, and its unit is the *pascal*, 1 Pa = 1 N/m<sup>2</sup>. The pressure relative to absolute vacuum is called the *absolute pressure*, and the difference between the absolute pressure and the local atmospheric pressure is called the *gage pressure*. Pressures below atmospheric pressure are called *vacuum pressures*. The absolute, gage, and vacuum pressures are related by

$$P_{\text{gage}} = P_{\text{abs}} - P_{\text{atm}} \quad (\text{for pressures above } P_{\text{atm}})$$

$$P_{\text{vac}} = P_{\text{atm}} - P_{\text{abs}} \quad (\text{for pressures below } P_{\text{atm}})$$

The pressure at a point in a fluid has the same magnitude in all directions. The variation of pressure with elevation is given by

$$\frac{dP}{dz} = -\rho g$$

where the positive  $z$  direction is taken to be upward. When the density of the fluid is constant, the pressure difference across a fluid layer of thickness  $\Delta z$  is

$$\Delta P = P_2 - P_1 = \rho g \Delta z$$

The absolute and gage pressures in a liquid open to the atmosphere at a depth  $h$  from the free surface are

$$P = P_{\text{atm}} + \rho gh \quad \text{or} \quad P_{\text{gage}} = \rho gh$$

Small to moderate pressure differences are measured by a *manometer*. The pressure in a stationary fluid remains constant in the horizontal direction. *Pascal's principle* states that the pressure applied to a confined fluid increases the pressure throughout by the same amount. The atmospheric pressure is measured by a *barometer* and is given by

$$P_{\text{atm}} = \rho gh$$

where  $h$  is the height of the liquid column.

## REFERENCES AND SUGGESTED READINGS

1. American Society for Testing and Materials. *Standards for Metric Practice*. ASTM E 380-79, January 1980.
2. A. Bejan. *Advanced Engineering Thermodynamics*. 2nd ed. New York: Wiley, 1997.
3. J. A. Schooley. *Thermometry*. Boca Raton, FL: CRC Press, 1986.

## PROBLEMS\*

## Thermodynamics

**1-1C** What is the difference between the classical and the statistical approaches to thermodynamics?

**1-2C** Why does a bicyclist pick up speed on a downhill road even when he is not pedaling? Does this violate the conservation of energy principle?

**1-3C** An office worker claims that a cup of cold coffee on his table warmed up to 80°C by picking up energy from the surrounding air, which is at 25°C. Is there any truth to his claim? Does this process violate any thermodynamic laws?

## Mass, Force, and Units

**1-4C** What is the difference between pound-mass and pound-force?

**1-5C** What is the difference between kg-mass and kg-force?

**1-6C** What is the net force acting on a car cruising at a constant velocity of 70 km/h (*a*) on a level road and (*b*) on an uphill road?


**1-7** A 3-kg plastic tank that has a volume of 0.2 m<sup>3</sup> is filled with liquid water. Assuming the density of water is 1000 kg/m<sup>3</sup>, determine the weight of the combined system.


**1-8** Determine the mass and the weight of the air contained in a room whose dimensions are 6 m × 6 m × 8 m. Assume the density of the air is 1.16 kg/m<sup>3</sup>. *Answers: 334.1 kg, 3277 N*

**1-9** At 45° latitude, the gravitational acceleration as a function of elevation *z* above sea level is given by  $g = a - bz$ , where  $a = 9.807 \text{ m/s}^2$  and  $b = 3.32 \times 10^{-6} \text{ s}^{-2}$ . Determine the height above sea level where the weight of an object will decrease by 1 percent. *Answer: 29,539 m*

**1-10E** A 150-lbm astronaut took his bathroom scale (a spring scale) and a beam scale (compares masses) to the moon where the local gravity is  $g = 5.48 \text{ ft/s}^2$ . Determine how much he will weigh (*a*) on the spring scale and (*b*) on the beam scale. *Answers: (a) 25.5 lbf; (b) 150 lbf*

**1-11** The acceleration of high-speed aircraft is sometimes expressed in *g*'s (in multiples of the standard acceleration of gravity). Determine the upward force, in N, that a 90-kg man would experience in an aircraft whose acceleration is 6 *g*'s.


**1-12**  A 5-kg rock is thrown upward with a force of 150 N at a location where the local gravitational acceleration is 9.79 m/s<sup>2</sup>. Determine the acceleration of the rock, in m/s<sup>2</sup>.

**1-13**  Solve Prob. 1-12 using EES (or other) software. Print out the entire solution, including the numerical results with proper units.

**1-14** The value of the gravitational acceleration *g* decreases with elevation from 9.807 m/s<sup>2</sup> at sea level to 9.767 m/s<sup>2</sup> at an altitude of 13,000 m, where large passenger planes cruise. Determine the percent reduction in the weight of an airplane cruising at 13,000 m relative to its weight at sea level.

## Systems, Properties, State, and Processes

**1-15C** A large fraction of the thermal energy generated in the engine of a car is rejected to the air by the radiator through the circulating water. Should the radiator be analyzed as a closed system or as an open system? Explain.

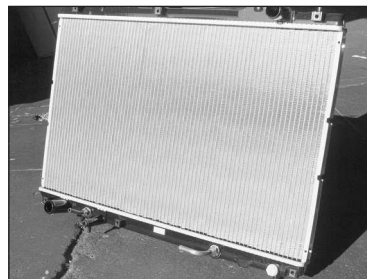

**FIGURE P1-15C**

© The McGraw-Hill Companies, Inc./Jill Braaten, photographer

**1-16C** A can of soft drink at room temperature is put into the refrigerator so that it will cool. Would you model the can of soft drink as a closed system or as an open system? Explain.

**1-17C** What is the difference between intensive and extensive properties?



**1-18C** For a system to be in thermodynamic equilibrium, do the temperature and the pressure have to be the same everywhere?

**1-19C** What is a quasi-equilibrium process? What is its importance in engineering?

**1-20C** Define the isothermal, isobaric, and isochoric processes.

**1-21C** What is the state postulate?


**1-22C** Is the state of the air in an isolated room completely specified by the temperature and the pressure? Explain.

\*Problems designated by a "C" are concept questions, and students are encouraged to answer them all. Problems designated by an "E" are in English units, and the SI users can ignore them. Problems with the  icon are solved using EES, and complete solutions together with parametric studies are included on the enclosed DVD. Problems with the  icon are comprehensive in nature and are intended to be solved with a computer, preferably using the EES software that accompanies this text.



**1–23C** What is a steady-flow process?

**1–24C** What is specific gravity? How is it related to density?

**1–25**  The density of atmospheric air varies with elevation, decreasing with increasing altitude. (a) Using the data given in the table, obtain a relation for the variation of density with elevation, and calculate the density at an elevation of 7000 m. (b) Calculate the mass of the atmosphere using the correlation you obtained. Assume the earth to be a perfect sphere with a radius of 6377 km, and take the thickness of the atmosphere to be 25 km.

$z$ , km	$\rho$ , kg/m <sup>3</sup>
6377	1.225
6378	1.112
6379	1.007
6380	0.9093
6381	0.8194
6382	0.7364
6383	0.6601
6385	0.5258
6387	0.4135
6392	0.1948
6397	0.08891
6402	0.04008

## Temperature

**1–26C** What is the zeroth law of thermodynamics?

**1–27C** What are the ordinary and absolute temperature scales in the SI and the English system?

**1–28C** Consider an alcohol and a mercury thermometer that read exactly 0°C at the ice point and 100°C at the steam point. The distance between the two points is divided into 100 equal parts in both thermometers. Do you think these thermometers will give exactly the same reading at a temperature of, say, 60°C? Explain.

**1–29** The deep body temperature of a healthy person is 37°C. What is it in kelvins?

**1–30E** Consider a system whose temperature is 18°C. Express this temperature in R, K, and °F.

**1–31** The temperature of a system rises by 15°C during a heating process. Express this rise in temperature in kelvins.

**1–32E** The temperature of a system drops by 45°F during a cooling process. Express this drop in temperature in K, R, and °C.

**1–33** Consider two closed systems A and B. System A contains 3000 kJ of thermal energy at 20°C, whereas system B contains 200 kJ of thermal energy at 50°C. Now the systems are brought into contact with each other. Determine the direction of any heat transfer between the two systems.

## Pressure, Manometer, and Barometer

**1–34C** What is the difference between gage pressure and absolute pressure?

**1–35C** Explain why some people experience nose bleeding and some others experience shortness of breath at high elevations.

**1–36C** Someone claims that the absolute pressure in a liquid of constant density doubles when the depth is doubled. Do you agree? Explain.

**1–37C** A tiny steel cube is suspended in water by a string. If the lengths of the sides of the cube are very small, how would you compare the magnitudes of the pressures on the top, bottom, and side surfaces of the cube?


**1–38C** Express Pascal's law, and give a real-world example of it.

**1–39C** Consider two identical fans, one at sea level and the other on top of a high mountain, running at identical speeds. How would you compare (a) the volume flow rates and (b) the mass flow rates of these two fans?

**1–40** A vacuum gage connected to a chamber reads 35 kPa at a location where the atmospheric pressure is 92 kPa. Determine the absolute pressure in the chamber.

**1–41E** A manometer is used to measure the air pressure in a tank. The fluid used has a specific gravity of 1.25, and the differential height between the two arms of the manometer is 28 in. If the local atmospheric pressure is 12.7 psia, determine the absolute pressure in the tank for the cases of the manometer arm with the (a) higher and (b) lower fluid level being attached to the tank.

**1–42** The water in a tank is pressurized by air, and the pressure is measured by a multifluid manometer as shown in Fig. P1–42. Determine the gage pressure of air in the tank if

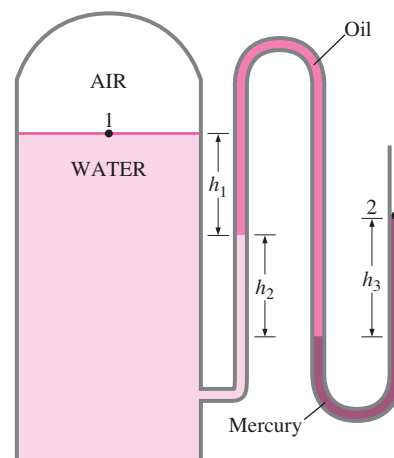

**FIGURE P1–42**

$h_1 = 0.2$  m,  $h_2 = 0.3$  m, and  $h_3 = 0.46$  m. Take the densities of water, oil, and mercury to be  $1000 \text{ kg/m}^3$ ,  $850 \text{ kg/m}^3$ , and  $13,600 \text{ kg/m}^3$ , respectively.

**1-43** Determine the atmospheric pressure at a location where the barometric reading is 750 mm Hg. Take the density of mercury to be  $13,600 \text{ kg/m}^3$ .

**1-44** The gage pressure in a liquid at a depth of 3 m is read to be 28 kPa. Determine the gage pressure in the same liquid at a depth of 9 m.

**1-45** The absolute pressure in water at a depth of 5 m is read to be 145 kPa. Determine (a) the local atmospheric pressure, and (b) the absolute pressure at a depth of 5 m in a liquid whose specific gravity is 0.85 at the same location.

**1-46E** Show that  $1 \text{ kgf/cm}^2 = 14.223 \text{ psi}$ .

**1-47E** A 200-pound man has a total foot imprint area of  $72 \text{ in}^2$ . Determine the pressure this man exerts on the ground if (a) he stands on both feet and (b) he stands on one foot.

**1-48** Consider a 70-kg woman who has a total foot imprint area of  $400 \text{ cm}^2$ . She wishes to walk on the snow, but the snow cannot withstand pressures greater than 0.5 kPa. Determine the minimum size of the snowshoes needed (imprint area per shoe) to enable her to walk on the snow without sinking.

**1-49** A vacuum gage connected to a tank reads 15 kPa at a location where the barometric reading is 750 mm Hg. Determine the absolute pressure in the tank. Take  $\rho_{\text{Hg}} = 13,590 \text{ kg/m}^3$ . *Answer: 85.0 kPa*

**1-50E** A pressure gage connected to a tank reads 50 psi at a location where the barometric reading is 29.1 mm Hg. Determine the absolute pressure in the tank. Take  $\rho_{\text{Hg}} = 848.4 \text{ lbf/ft}^3$ . *Answer: 64.3 psia*

**1-51** A pressure gage connected to a tank reads 500 kPa at a location where the atmospheric pressure is 94 kPa. Determine the absolute pressure in the tank.


**1-52** The barometer of a mountain hiker reads 930 mbars at the beginning of a hiking trip and 780 mbars at the end. Neglecting the effect of altitude on local gravitational acceleration, determine the vertical distance climbed. Assume an average air density of  $1.20 \text{ kg/m}^3$ . *Answer: 1274 m*

**1-53** The basic barometer can be used to measure the height of a building. If the barometric readings at the top and at the bottom of a building are 730 and 755 mm Hg, respectively, determine the height of the building. Take the densities of air and mercury to be  $1.18 \text{ kg/m}^3$  and  $13,600 \text{ kg/m}^3$ , respectively.



**FIGURE P1-53**

© Vol. 74/Corbis

**1-54**  Solve Prob. 1-53 using EES (or other) software. Print out the entire solution, including the numerical results with proper units.

**1-55** Determine the pressure exerted on a diver at 30 m below the free surface of the sea. Assume a barometric pressure of 101 kPa and a specific gravity of 1.03 for seawater. *Answer: 404.0 kPa*

**1-56E** Determine the pressure exerted on the surface of a submarine cruising 175 ft below the free surface of the sea. Assume that the barometric pressure is 14.7 psia and the specific gravity of seawater is 1.03.

**1-57** A gas is contained in a vertical, frictionless piston-cylinder device. The piston has a mass of 4 kg and a cross-sectional area of  $35 \text{ cm}^2$ . A compressed spring above the piston exerts a force of 60 N on the piston. If the atmospheric pressure is 95 kPa, determine the pressure inside the cylinder. *Answer: 123.4 kPa*






FIGURE P1-57

**1-58**  Reconsider Prob. 1-57. Using EES (or other) software, investigate the effect of the spring force in the range of 0 to 500 N on the pressure inside the cylinder. Plot the pressure against the spring force, and discuss the results.

**1-59**  Both a gage and a manometer are attached to a gas tank to measure its pressure. If the reading on the pressure gage is 80 kPa, determine the distance between the two fluid levels of the manometer if the fluid is (a) mercury ( $\rho = 13,600 \text{ kg/m}^3$ ) or (b) water ( $\rho = 1000 \text{ kg/m}^3$ ).

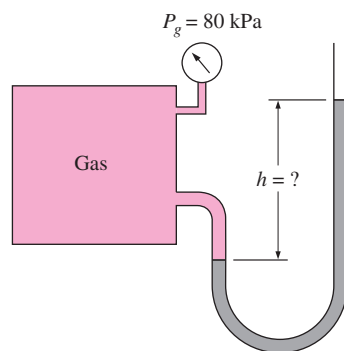



FIGURE P1-59

**1-60**  Reconsider Prob. 1-59. Using EES (or other) software, investigate the effect of the manometer fluid density in the range of 800 to 13,000  $\text{kg/m}^3$  on the differential fluid height of the manometer. Plot the differential fluid height against the density, and discuss the results.

**1-61** A manometer containing oil ( $\rho = 850 \text{ kg/m}^3$ ) is attached to a tank filled with air. If the oil-level difference between the two columns is 60 cm and the atmospheric pressure is 98 kPa, determine the absolute pressure of the air in the tank. *Answer: 103 kPa*

**1-62** A mercury manometer ( $\rho = 13,600 \text{ kg/m}^3$ ) is connected to an air duct to measure the pressure inside. The differ-

ence in the manometer levels is 15 mm, and the atmospheric pressure is 100 kPa. (a) Judging from Fig. P1-62, determine if the pressure in the duct is above or below the atmospheric pressure. (b) Determine the absolute pressure in the duct.




FIGURE P1-62

**1-63** Repeat Prob. 1-62 for a differential mercury height of 45 mm.

**1-64** Blood pressure is usually measured by wrapping a closed air-filled jacket equipped with a pressure gage around the upper arm of a person at the level of the heart. Using a mercury manometer and a stethoscope, the systolic pressure (the maximum pressure when the heart is pumping) and the diastolic pressure (the minimum pressure when the heart is resting) are measured in mm Hg. The systolic and diastolic pressures of a healthy person are about 120 mm Hg and 80 mm Hg, respectively, and are indicated as 120/80. Express both of these gage pressures in kPa, psi, and meter water column.

**1-65** The maximum blood pressure in the upper arm of a healthy person is about 120 mm Hg. If a vertical tube open to the atmosphere is connected to the vein in the arm of the person, determine how high the blood will rise in the tube. Take the density of the blood to be 1050  $\text{kg/m}^3$ .


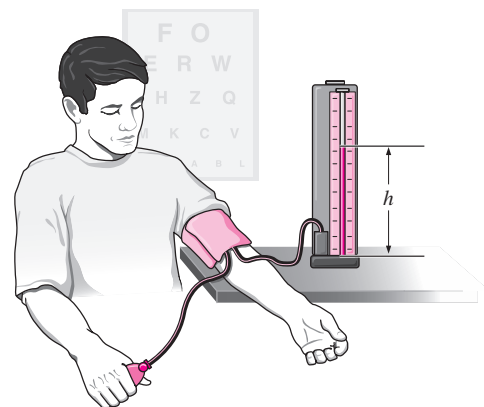


FIGURE P1-65

**1-66** Consider a 1.8-m-tall man standing vertically in water and completely submerged in a pool. Determine the difference between the pressures acting at the head and at the toes of this man, in kPa.


**1-67** Consider a U-tube whose arms are open to the atmosphere. Now water is poured into the U-tube from one arm, and light oil ( $\rho = 790 \text{ kg/m}^3$ ) from the other. One arm contains 70-cm-high water, while the other arm contains both fluids with an oil-to-water height ratio of 4. Determine the height of each fluid in that arm.



**FIGURE P1-67**

**1-68** The hydraulic lift in a car repair shop has an output diameter of 30 cm and is to lift cars up to 2000 kg. Determine the fluid gage pressure that must be maintained in the reservoir.


**1-69** Freshwater and seawater flowing in parallel horizontal pipelines are connected to each other by a double U-tube manometer, as shown in Fig. P1-69. Determine the pressure difference between the two pipelines. Take the density of seawater at that location to be  $\rho = 1035 \text{ kg/m}^3$ . Can the air column be ignored in the analysis?

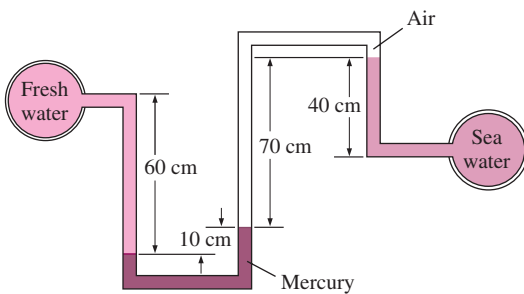

**FIGURE P1-69**

**1-70** Repeat Prob. 1-69 by replacing the air with oil whose specific gravity is 0.72.


**1-71E** The pressure in a natural gas pipeline is measured by the manometer shown in Fig. P1-71E with one of the arms open to the atmosphere where the local atmospheric pressure is 14.2 psia. Determine the absolute pressure in the pipeline.

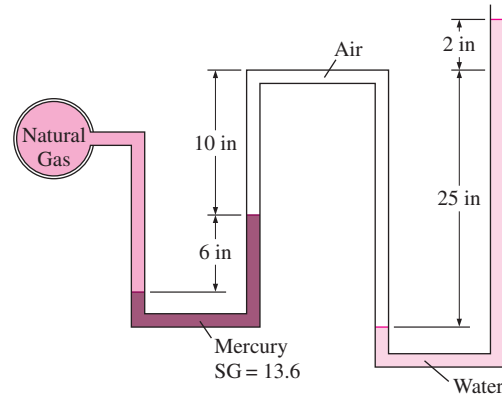

**FIGURE P1-71E**

**1-72E** Repeat Prob. 1-71E by replacing air by oil with a specific gravity of 0.69.


**1-73** The gage pressure of the air in the tank shown in Fig. P1-73 is measured to be 80 kPa. Determine the differential height  $h$  of the mercury column.

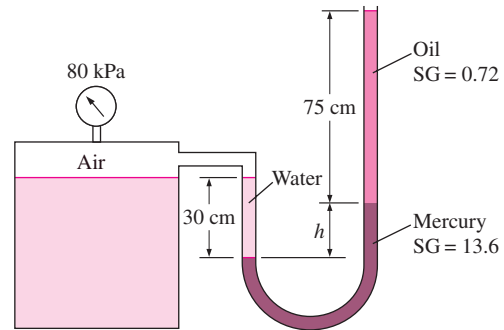

**FIGURE P1-73**

**1-74** Repeat Prob. 1-73 for a gage pressure of 40 kPa.


**1-75** The top part of a water tank is divided into two compartments, as shown in Fig. P1-75. Now a fluid with an

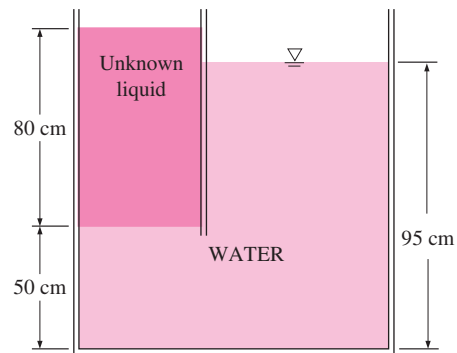

**FIGURE P1-75**


unknown density is poured into one side, and the water level rises a certain amount on the other side to compensate for this effect. Based on the final fluid heights shown on the figure, determine the density of the fluid added. Assume the liquid does not mix with water.

**1-76** Consider a double-fluid manometer attached to an air pipe shown in Fig. P1-76. If the specific gravity of one fluid is 13.55, determine the specific gravity of the other fluid for the indicated absolute pressure of air. Take the atmospheric pressure to be 100 kPa. *Answer: 5.0*

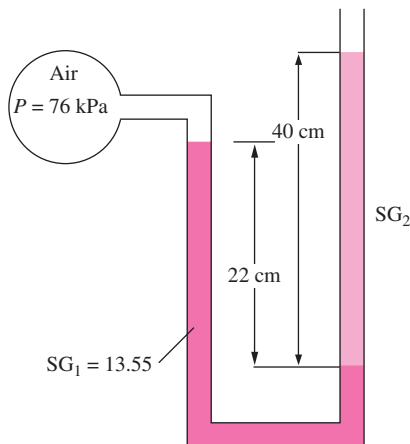


**FIGURE P1-76**

**1-77** Consider the system shown in Fig. P1-77. If a change of 0.7 kPa in the pressure of air causes the brine–mercury interface in the right column to drop by 5 mm in the brine level in the right column while the pressure in the brine pipe remains constant, determine the ratio of  $A_2/A_1$ .

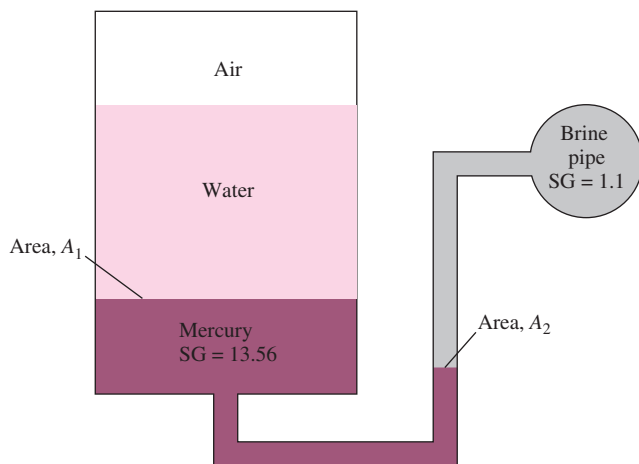

**FIGURE P1-77**

**1-78** A multifluid container is connected to a U-tube, as shown in Fig. P1-78. For the given specific gravities and fluid column heights, determine the gage pressure at A. Also determine the height of a mercury column that would create the same pressure at A. *Answers: 0.471 kPa, 0.353 cm*

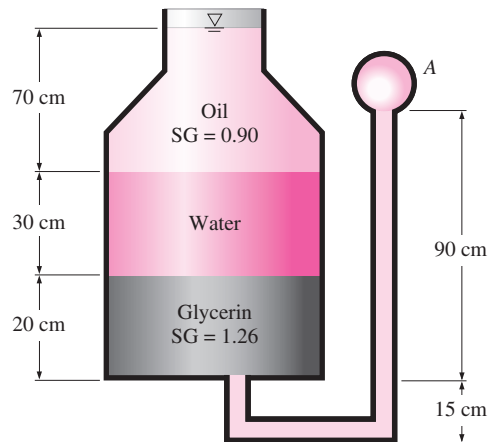

**FIGURE P1-78**

**Solving Engineering Problems and EES**

**1-79C** What is the value of the engineering software packages in (a) engineering education and (b) engineering practice?

**1-80** Determine a positive real root of this equation using EES:

$$2x^3 - 10x^{0.5} - 3x = -3$$

**1-81** Solve this system of two equations with two unknowns using EES:


$$\begin{aligned} x^3 - y^2 &= 7.75 \\ 3xy + y &= 3.5 \end{aligned}$$

**1-82** Solve this system of three equations with three unknowns using EES:

$$\begin{aligned} 2x - y + z &= 5 \\ 3x^2 + 2y &= z + 2 \\ xy + 2z &= 8 \end{aligned}$$

**1-83** Solve this system of three equations with three unknowns using EES:

$$\begin{aligned} x^2y - z &= 1 \\ x - 3y^{0.5} + xz &= -2 \\ x + y - z &= 2 \end{aligned}$$

**1-84E**  Specific heat is defined as the amount of energy needed to increase the temperature of a unit mass of a substance by one degree. The specific heat of water at room temperature is  $4.18 \text{ kJ/kg} \cdot ^\circ\text{C}$  in SI unit system. Using the unit conversion function capability of EES, express the specific heat of water in (a)  $\text{kJ/kg} \cdot \text{K}$ , (b)  $\text{Btu/lbm} \cdot \text{F}$ , (c)  $\text{Btu/lbm} \cdot \text{R}$ , and (d)  $\text{kCal/kg} \cdot ^\circ\text{C}$  units.

Answers: (a) 4.18, (b) (c) (d) 0.9984

### Review Problems

**1-85** A hydraulic lift is to be used to lift a 2500 kg weight by putting a weight of 25 kg on a piston with a diameter of 10 cm. Determine the diameter of the piston on which the weight is to be placed.

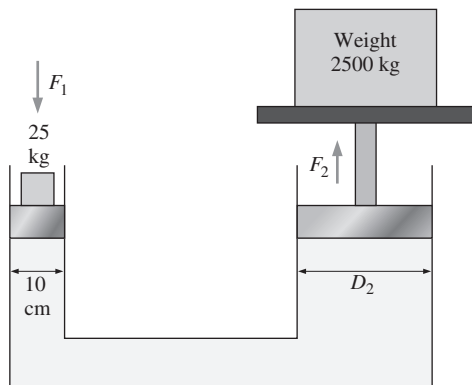


FIGURE P1-85

**1-86** A vertical piston-cylinder device contains a gas at a pressure of 100 kPa. The piston has a mass of 5 kg and a diameter of 12 cm. Pressure of the gas is to be increased by placing some weights on the piston. Determine the local atmospheric pressure and the mass of the weights that will double the pressure of the gas inside the cylinder. Answers: 95.7 kPa, 115.3 kg




FIGURE P1-86

**1-87** The pilot of an airplane reads the altitude 3000 m and the absolute pressure 58 kPa when flying over a city. Calculate the local atmospheric pressure in that city in kPa and in mm Hg. Take the densities of air and mercury to be  $1.15 \text{ kg/m}^3$  and  $13,600 \text{ kg/m}^3$ , respectively.

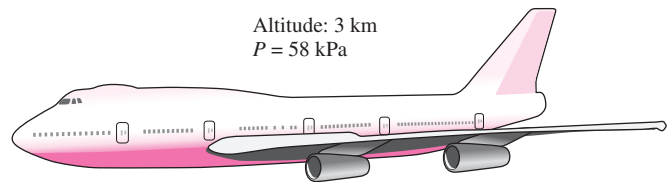


FIGURE P1-87

**1-88** The weight of bodies may change somewhat from one location to another as a result of the variation of the gravitational acceleration  $g$  with elevation. Accounting for this variation using the relation in Prob. 1-9, determine the weight of an 80-kg person at sea level ( $z = 0$ ), in Denver ( $z = 1610 \text{ m}$ ), and on the top of Mount Everest ( $z = 8848 \text{ m}$ ).

**1-89** A man goes to a traditional market to buy a steak for dinner. He finds a 12-oz steak ( $1 \text{ lbm} = 16 \text{ oz}$ ) for \$3.15. He then goes to the adjacent international market and finds a 320-g steak of identical quality for \$2.80. Which steak is the better buy?

**1-90** The reactive force developed by a jet engine to push an airplane forward is called thrust, and the thrust developed by the engine of a Boeing 777 is about 85,000 lbf. Express this thrust in N and kgf.

**1-91E** The efficiency of a refrigerator increases by 3 percent for each  $^\circ\text{C}$  rise in the minimum temperature in the device. What is the increase in the efficiency for each (a) K, (b)  $^\circ\text{F}$ , and (c) R rise in temperature?

**1-92E** The boiling temperature of water decreases by about  $3^\circ\text{C}$  for each 1000-m rise in altitude. What is the decrease in the boiling temperature in (a) K, (b)  $^\circ\text{F}$ , and (c) R for each 1000-m rise in altitude?

**1-93E** The average body temperature of a person rises by about  $2^\circ\text{C}$  during strenuous exercise. What is the rise in the body temperature in (a) K, (b)  $^\circ\text{F}$ , and (c) R during strenuous exercise?

**1-94E** Hyperthermia of  $5^\circ\text{C}$  (i.e.,  $5^\circ\text{C}$  rise above the normal body temperature) is considered fatal. Express this fatal level of hyperthermia in (a) K, (b)  $^\circ\text{F}$ , and (c) R.

**1-95E** A house is losing heat at a rate of  $4500 \text{ kJ/h}$  per  $^\circ\text{C}$  temperature difference between the indoor and the outdoor temperatures. Express the rate of heat loss from this house per (a) K, (b)  $^\circ\text{F}$ , and (c) R difference between the indoor and the outdoor temperature.

**1-96** The average temperature of the atmosphere in the world is approximated as a function of altitude by the relation

$$T_{\text{atm}} = 288.15 - 6.5z$$

where  $T_{\text{atm}}$  is the temperature of the atmosphere in K and  $z$  is the altitude in km with  $z = 0$  at sea level. Determine the average temperature of the atmosphere outside an airplane that is cruising at an altitude of 12,000 m.


**1-97** Joe Smith, an old-fashioned engineering student, believes that the boiling point of water is best suited for use as the reference point on temperature scales. Unhappy that the boiling point corresponds to some odd number in the current absolute temperature scales, he has proposed a new absolute temperature scale that he calls the Smith scale. The temperature unit on this scale is *smith*, denoted by S, and the boiling point of water on this scale is assigned to be 1000 S. From a thermodynamic point of view, discuss if it is an acceptable temperature scale. Also, determine the ice point of water on the Smith scale and obtain a relation between the Smith and Celsius scales.

**1-98E** It is well-known that cold air feels much colder in windy weather than what the thermometer reading indicates because of the “chilling effect” of the wind. This effect is due to the increase in the convection heat transfer coefficient with increasing air velocities. The *equivalent wind chill temperature* in °F is given by [ASHRAE, *Handbook of Fundamentals* (Atlanta, GA, 1993), p. 8.15]

$$T_{\text{equiv}} = 91.4 - (91.4 - T_{\text{ambient}}) \times (0.475 - 0.0203V + 0.304\sqrt{V})$$

where  $V$  is the wind velocity in mi/h and  $T_{\text{ambient}}$  is the ambient air temperature in °F in calm air, which is taken to be air with light winds at speeds up to 4 mi/h. The constant 91.4°F in the given equation is the mean skin temperature of a resting person in a comfortable environment. Windy air at temperature  $T_{\text{ambient}}$  and velocity  $V$  will feel as cold as the calm air at temperature  $T_{\text{equiv}}$ . Using proper conversion factors, obtain an equivalent relation in SI units where  $V$  is the wind velocity in km/h and  $T_{\text{ambient}}$  is the ambient air temperature in °C.


**Answer:** 
$$T_{\text{equiv}} = 33.0 - (33.0 - T_{\text{ambient}}) \times (0.475 - 0.0126V + 0.240\sqrt{V})$$

**1-99E**  Reconsider Problem 1-98E. Using EES (or other) software, plot the equivalent wind chill temperatures in °F as a function of wind velocity in the range of 4 to 100 mph for the ambient temperatures of 20, 40, and 60°F. Discuss the results.


**1-100** An air-conditioning system requires a 20-m-long section of 15-cm diameter duct work to be laid underwater.

Determine the upward force the water will exert on the duct. Take the densities of air and water to be 1.3 kg/m<sup>3</sup> and 1000 kg/m<sup>3</sup>, respectively.

**1-101** Balloons are often filled with helium gas because it weighs only about one-seventh of what air weighs under identical conditions. The buoyancy force, which can be expressed as  $F_b = \rho_{\text{air}}gV_{\text{balloon}}$ , will push the balloon upward. If the balloon has a diameter of 10 m and carries two people, 70 kg each, determine the acceleration of the balloon when it is first released. Assume the density of air is  $\rho = 1.16 \text{ kg/m}^3$ , and neglect the weight of the ropes and the cage. **Answer:** 16.5 m/s<sup>2</sup>

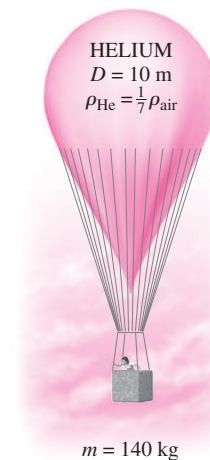

**FIGURE P1-101**


**1-102**  Reconsider Prob. 1-101. Using EES (or other) software, investigate the effect of the number of people carried in the balloon on acceleration. Plot the acceleration against the number of people, and discuss the results.

**1-103** Determine the maximum amount of load, in kg, the balloon described in Prob. 1-101 can carry. **Answer:** 520.5 kg

**1-104E** The pressure in a steam boiler is given to be 92 kgf/cm<sup>2</sup>. Express this pressure in psi, kPa, atm, and bars.

**1-105** The basic barometer can be used as an altitude-measuring device in airplanes. The ground control reports a barometric reading of 753 mm Hg while the pilot’s reading is 690 mm Hg. Estimate the altitude of the plane from ground level if the average air density is 1.20 kg/m<sup>3</sup>. **Answer:** 714 m

**1-106** The lower half of a 10-m-high cylindrical container is filled with water ( $\rho = 1000 \text{ kg/m}^3$ ) and the upper half with oil that has a specific gravity of 0.85. Determine the pressure difference between the top and bottom of the cylinder.  
*Answer: 90.7 kPa*



**FIGURE P1-106**


**1-107** A vertical, frictionless piston-cylinder device contains a gas at 250 kPa absolute pressure. The atmospheric pressure outside is 100 kPa, and the piston area is  $30 \text{ cm}^2$ . Determine the mass of the piston.

**1-108** A pressure cooker cooks a lot faster than an ordinary pan by maintaining a higher pressure and temperature inside. The lid of a pressure cooker is well sealed, and steam can escape only through an opening in the middle of the lid. A separate metal piece, the petcock, sits on top of this opening and prevents steam from escaping until the pressure force overcomes the weight of the petcock. The periodic escape of the steam in this manner prevents any potentially dangerous pressure buildup and keeps the pressure inside at a constant value. Determine the mass of the petcock of a pressure cooker whose operation pressure is 100 kPa gage and has an opening cross-sectional area of  $4 \text{ mm}^2$ . Assume an atmospheric pressure of 101 kPa, and draw the free-body diagram of the petcock. *Answer: 40.8 g*



**FIGURE P1-108**


**1-109** A glass tube is attached to a water pipe, as shown in Fig. P1-109. If the water pressure at the bottom of the tube is 115 kPa and the local atmospheric pressure is 92 kPa, determine how high the water will rise in the tube, in m. Take the density of water to be  $1000 \text{ kg/m}^3$ .

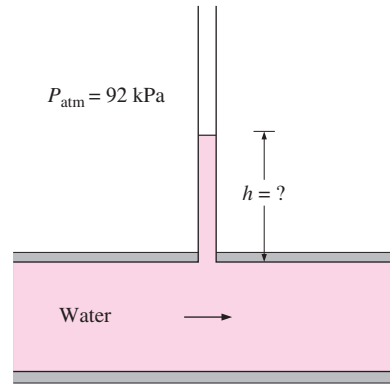

**FIGURE P1-109**

**1-110** The average atmospheric pressure on earth is approximated as a function of altitude by the relation  $P_{\text{atm}} = 101.325 (1 - 0.02256z)^{5.256}$ , where  $P_{\text{atm}}$  is the atmospheric pressure in kPa and  $z$  is the altitude in km with  $z = 0$  at sea level. Determine the approximate atmospheric pressures at Atlanta ( $z = 306 \text{ m}$ ), Denver ( $z = 1610 \text{ m}$ ), Mexico City ( $z = 2309 \text{ m}$ ), and the top of Mount Everest ( $z = 8848 \text{ m}$ ).


**1-111** When measuring small pressure differences with a manometer, often one arm of the manometer is inclined to improve the accuracy of reading. (The pressure difference is still proportional to the vertical distance and not the actual length of the fluid along the tube.) The air pressure in a circular duct is to be measured using a manometer whose open arm is inclined  $35^\circ$  from the horizontal, as shown in Fig. P1-111. The density of the liquid in the manometer is  $0.81 \text{ kg/L}$ , and the vertical distance between the fluid levels in the two arms of the manometer is 8 cm. Determine the gage pressure of air in the duct and the length of the fluid column in the inclined arm above the fluid level in the vertical arm.

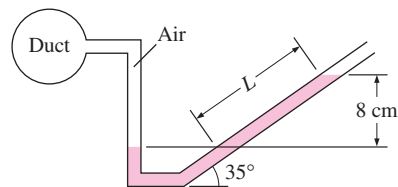

**FIGURE P1-111**




**1-112E** Consider a U-tube whose arms are open to the atmosphere. Now equal volumes of water and light oil ( $\rho = 49.3 \text{ lbm/ft}^3$ ) are poured from different arms. A person blows from the oil side of the U-tube until the contact surface of the two fluids moves to the bottom of the U-tube, and thus the liquid levels in the two arms are the same. If the fluid height in each arm is 30 in, determine the gage pressure the person exerts on the oil by blowing.




**FIGURE P1-112E**

**1-113** Intravenous infusions are usually driven by gravity by hanging the fluid bottle at sufficient height to counteract the blood pressure in the vein and to force the fluid into the body. The higher the bottle is raised, the higher the flow rate of the fluid will be. (a) If it is observed that the fluid and the blood pressures balance each other when the bottle is 1.2 m above the arm level, determine the gage pressure of the blood. (b) If the gage pressure of the fluid at the arm level needs to be 20 kPa for sufficient flow rate, determine how high the bottle must be placed. Take the density of the fluid to be  $1020 \text{ kg/m}^3$ .

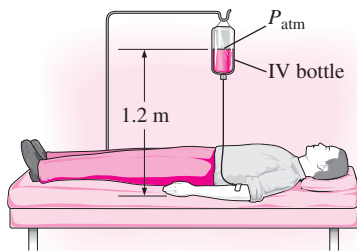

**FIGURE P1-113**


**1-114** A gasoline line is connected to a pressure gage through a double-U manometer, as shown in Fig. P1-114. If the reading of the pressure gage is 370 kPa, determine the gage pressure of the gasoline line.

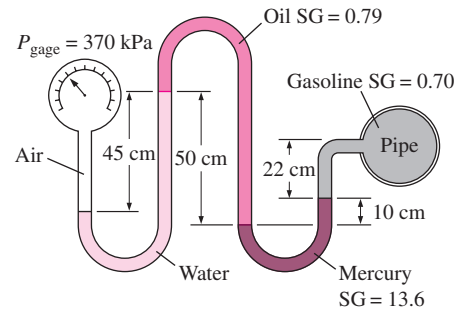

**FIGURE P1-114**

**1-115** Repeat Prob. 1-114 for a pressure gage reading of 180 kPa.

**1-116E** A water pipe is connected to a double-U manometer as shown in Fig. P1-116E at a location where the local atmospheric pressure is 14.2 psia. Determine the absolute pressure at the center of the pipe.

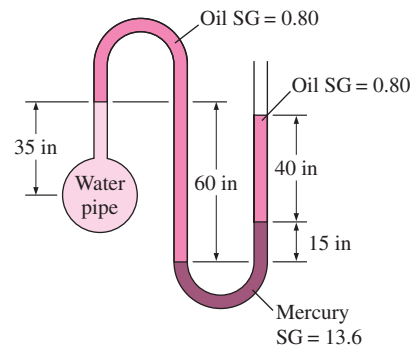

**FIGURE P1-116E**

**1-117** It is well-known that the temperature of the atmosphere varies with altitude. In the troposphere, which extends to an altitude of 11 km, for example, the variation of temperature can be approximated by  $T = T_0 - \beta z$ , where  $T_0$  is the temperature at sea level, which can be taken to be 288.15 K, and  $\beta = 0.0065 \text{ K/m}$ . The gravitational acceleration also changes with altitude as  $g(z) = g_0 / (1 + z/6,370,320)^2$  where  $g_0 = 9.807 \text{ m/s}^2$  and  $z$  is the elevation from sea level in m. Obtain a relation for the variation of pressure in the troposphere (a) by ignoring and (b) by considering the variation of  $g$  with altitude.

**1-118** The variation of pressure with density in a thick gas layer is given by  $P = C\rho^n$ , where  $C$  and  $n$  are constants. Noting that the pressure change across a differential fluid layer of thickness  $dz$  in the vertical  $z$ -direction is given as  $dP = -\rho g dz$ , obtain a relation for pressure as a function of

elevation  $z$ . Take the pressure and density at  $z = 0$  to be  $P_0$  and  $\rho_0$ , respectively.

**1-119** Pressure transducers are commonly used to measure pressure by generating analog signals usually in the range of 4 mA to 20 mA or 0 V-dc to 10 V-dc in response to applied pressure. The system whose schematic is shown in Fig. P1-119 can be used to calibrate pressure transducers. A rigid container is filled with pressurized air, and pressure is measured by the manometer attached. A valve is used to regulate the pressure in the container. Both the pressure and the electric signal are measured simultaneously for various settings, and the results are tabulated. For the given set of measurements, obtain the calibration curve in the form of  $P = aI + b$ , where  $a$  and  $b$  are constants, and calculate the pressure that corresponds to a signal of 10 mA.

$\Delta h$ , mm	28.0	181.5	297.8	413.1	765.9
$I$ , mA	4.21	5.78	6.97	8.15	11.76
$\Delta h$ , mm	1027	1149	1362	1458	1536
$I$ , mA	14.43	15.68	17.86	18.84	19.64

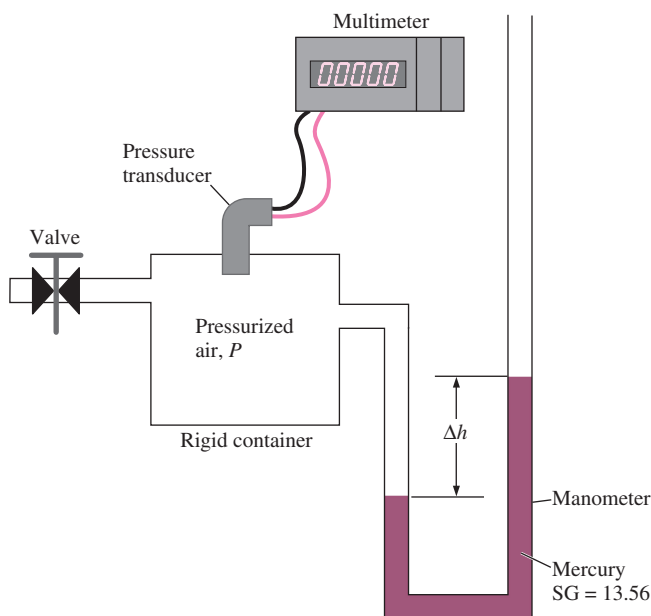


FIGURE P1-119

### Fundamentals of Engineering (FE) Exam Problems

**1-120** Consider a fish swimming 5 m below the free surface of water. The increase in the pressure exerted on the fish when it dives to a depth of 45 m below the free surface is

- (a) 392 Pa      (b) 9800 Pa      (c) 50,000 Pa  
(d) 392,000 Pa      (e) 441,000 Pa

**1-121** The atmospheric pressures at the top and the bottom of a building are read by a barometer to be 96.0 and 98.0

kPa. If the density of air is  $1.0 \text{ kg/m}^3$ , the height of the building is

- (a) 17 m      (b) 20 m      (c) 170 m  
(d) 204 m      (e) 252 m

**1-122** An apple loses 4.5 kJ of heat as it cools per  $^\circ\text{C}$  drop in its temperature. The amount of heat loss from the apple per  $^\circ\text{F}$  drop in its temperature is

- (a) 1.25 kJ      (b) 2.50 kJ      (c) 5.0 kJ  
(d) 8.1 kJ      (e) 4.1 kJ

**1-123** Consider a 2-m deep swimming pool. The pressure difference between the top and bottom of the pool is

- (a) 12.0 kPa      (b) 19.6 kPa      (c) 38.1 kPa  
(d) 50.8 kPa      (e) 200 kPa

**1-124** At sea level, the weight of 1 kg mass in SI units is 9.81 N. The weight of 1 lbm mass in English units is

- (a) 1 lbf      (b) 9.81 lbf      (c) 32.2 lbf  
(d) 0.1 lbf      (e) 0.031 lbf

**1-125** During a heating process, the temperature of an object rises by  $20^\circ\text{C}$ . This temperature rise is equivalent to a temperature rise of

- (a)  $20^\circ\text{F}$       (b)  $52^\circ\text{F}$       (c) 36 K  
(d) 36 R      (e) 293 K

### Design, Essay, and Experiment Problems

**1-126** Write an essay on different temperature measurement devices. Explain the operational principle of each device, its advantages and disadvantages, its cost, and its range of applicability. Which device would you recommend for use in the following cases: taking the temperatures of patients in a doctor's office, monitoring the variations of temperature of a car engine block at several locations, and monitoring the temperatures in the furnace of a power plant?

**1-127** Write an essay on the various mass- and volume-measurement devices used throughout history. Also, explain the development of the modern units for mass and volume.

**1-128** Write an essay on the various mass- and volume-measurement devices used throughout history. Also, explain the development of the modern units for mass and volume.

### 1-129 Density of Water as a Function of Temperature Experiment

The density of water as a function of temperature is obtained with a sensitive cylindrical float constructed from brass tubing. The float is placed in a Thermos bottle filled with water at different temperatures. From 0 to  $4^\circ\text{C}$  (water density is a maximum at  $4^\circ\text{C}$ ) the float rose about 8 mm and from 4 to  $25^\circ\text{C}$  the float sank about 40 mm. The analysis includes differential and integral calculus to account for thermal expansion of the float. The final results closely follow the published density curve including the characteristic hump at  $4^\circ\text{C}$ . Obtain this density curve using the video clip, the complete write-up, and the data provided on the DVD accompanying this book.